

**IPC-6018B**  
**2011-November**  
**Qualification and Performance**  
**Specification for High Frequency**  
**(Microwave) Printed Boards**

*A standard developed by IPC*

*Association Connecting Electronics Industries*



**The Principles of Standardization**

In May 1995 the IPC's Technical Activities Executive Committee (TAEC) adopted Principles of Standardization as a guiding principle of IPC's standardization efforts.

**Standards Should:**

- Show relationship to Design for Manufacturability (DFM) and Design for the Environment (DFE)
- Minimize time to market
- Contain simple (simplified) language
- Just include spec information
- Focus on end product performance
- Include a feedback system on use and problems for future improvement

**Standards Should Not:**

- Inhibit innovation
- Increase time-to-market
- Keep people out
- Increase cycle time
- Tell you how to make something
- Contain anything that cannot be defended with data

**Notice**

IPC Standards and Publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such Standards and Publications shall not in any respect preclude any member or nonmember of IPC from manufacturing or selling products not conforming to such Standards and Publication, nor shall the existence of such Standards and Publications preclude their voluntary use by those other than IPC members, whether the standard is to be used either domestically or internationally.

Recommended Standards and Publications are adopted by IPC without regard to whether their adoption may involve patents on articles, materials, or processes. By such action, IPC does not assume any liability to any patent owner, nor do they assume any obligation whatever to parties adopting the Recommended Standard or Publication. Users are also wholly responsible for protecting themselves against all claims of liabilities for patent infringement.

**IPC Position Statement on Specification Revision Change**

It is the position of IPC's Technical Activities Executive Committee that the use and implementation of IPC publications is voluntary and is part of a relationship entered into by customer and supplier. When an IPC publication is updated and a new revision is published, it is the opinion of the TAEC that the use of the new revision as part of an existing relationship is not automatic unless required by the contract. The TAEC recommends the use of the latest revision. Adopted October 6, 1998

**Why is there a charge for this document?**

Your purchase of this document contributes to the ongoing development of new and updated industry standards and publications. Standards allow manufacturers, customers, and suppliers to understand one another better. Standards allow manufacturers greater efficiencies when they can set up their processes to meet industry standards, allowing them to offer their customers lower costs.

IPC spends hundreds of thousands of dollars annually to support IPC's volunteers in the standards and publications development process. There are many rounds of drafts sent out for review and the committees spend hundreds of hours in review and development. IPC's staff attends and participates in committee activities, typesets and circulates document drafts, and follows all necessary procedures to qualify for ANSI approval.

IPC's membership dues have been kept low to allow as many companies as possible to participate. Therefore, the standards and publications revenue is necessary to complement dues revenue. The price schedule offers a 50% discount to IPC members. If your company buys IPC standards and publications, why not take advantage of this and the many other benefits of IPC membership as well? For more information on membership in IPC, please visit [www.ipc.org](http://www.ipc.org) or call 847/597-2872.

Thank you for your continued support.



IPC-6018B

# Qualification and Performance Specification for High Frequency (Microwave) Printed Board

Developed by the IPC High Speed/High Frequency Board Performance  
Subcommittee (D-22) of the High Speed/High Frequency Committee (D-20)


***Supersedes:***

IPC 6018A – January 2002  
IPC-6018 – January 1998

Users of this publication are encouraged to participate in the  
development of future revisions.

Contact:

IPC  
3000 Lakeside Drive, Suite 309S  
Bannockburn, Illinois  
60015-1249  
Tel 847615.7100  
Fax 847615.7105

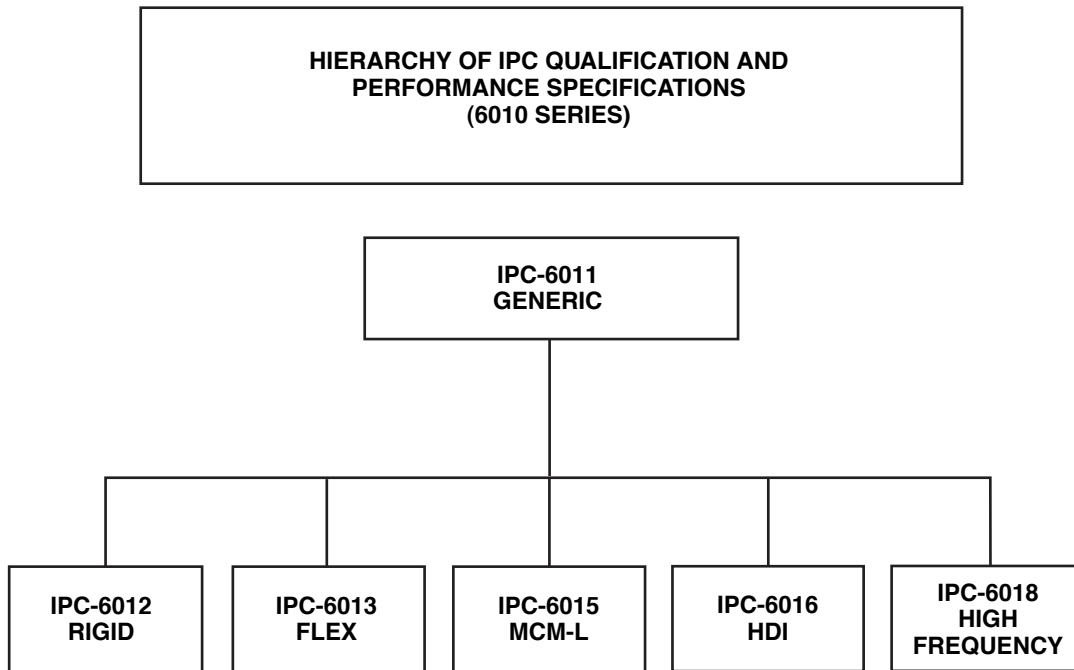

## FOREWORD

This specification is intended to provide information on the detailed performance criteria of rigid printed boards. It supersedes IPC-6012B and was developed as a revision to those documents. The information contained herein is also intended to supplement the generic requirements identified in IPC-6011. When used together, these documents should lead both manufacturer and customer to consistent terms of acceptability.

IPC's documentation strategy is to provide distinct documents that focus on specific aspects of electronic packaging issues. In this regard, document sets are used to provide the total information related to a particular electronic packaging topic. A document set is identified by a four digit number that ends in zero (0) (i.e., IPC-6010).

Included in the set is the generic information, which is contained in the first document of the set. The generic specification is supplemented by one or multiple performance documents, each of which provide a specific focus on one aspect of the topic or the technology selected.

Failure to have all information available prior to building a board may result in a conflict in terms of acceptability.

As technology changes, a performance specification will be updated, or new focus specifications will be added to the document set. The IPC invites input on the effectiveness of the documentation and encourages user response through completion of "Suggestions for Improvement" forms located at the end of each document.

## Acknowledgment

Any document involving a complex technology draws material from a vast number of sources. While the principal members of the High Speed/High Frequency Board Performance Subcommittee (D-22) of the High Speed/High Frequency Committee (D-20) are shown below, it is not possible to include all of those who assisted in the evolution of this standard. To each of them, the members of the IPC extend their gratitude.

<b>High Speed/High Frequency Committee</b>	<b>High Speed/High Frequency Board Performance Subcommittee</b>	<b>Technical Liaisons of the IPC Board of Directors</b>
Chair Ed Sandor, Taconic Advanced Dielectric Division	Chair Mike Luke CID	Dongkai Shangguan Flextronics International
Vice-Chair Tom Bresnan R&D Circuits	Vice-Chair Mahendra Gandhi Northrop Grumman Aerospace Systems	Shane Whiteside TTM Technologies
<b>High Speed/High Frequency Board Performance Subcommittee</b>		
Lance Auer, Raytheon Missile Systems	Hue Green, Lockheed Martin Space Systems Company	Marybeth Perrino, Endicott Interconnect Technologies Inc
Robert J. Black, Northrop Grumman Corporation	Michael Green, Lockheed Martin Space Systems Company	Randy R. Reed, Viasystems Group, Inc.
Thomas N. Bresnan, R & D Circuits	Alisha A. Groop, Lockheed Martin Space Systems Company	Jose Rios, Endicott Interconnect Technologies Inc
Mark Buechner, BAE Systems	Philip Henault, Raytheon Company	Edward Sandor, Taconic Advanced Dielectric Division
Byron Case, L-3 Communications	Thomas E. Kemp, Rockwell Collins	Karl Sauter, Oracle America, Inc.
Denise Chevalier, Amphenol Printed Circuits, Inc.	Clifford Maddox, Boeing Company	Joseph Schmidt, Raytheon Missile Systems
Joshua Civiello, DLA Land and Maritime	Kenneth Manning, Raytheon Company	Antonio R. Senese, Panasonic Electric Works
Christine Coapman, Delphi Electronics and Safety	Rene Martinez, Northrop Grumman Aerospace Systems	Gilbert Shelby, Raytheon Systems Company
David J. Corbett, DLA Land and Maritime	Thomas McCarthy, Taconic Advanced Dielectric Division	Russell S. Shepherd, Microtek Laboratories
Don DeGroot, CCNi	James J. Monarchio, TTM Technologies, Inc.	Lowell Sherman, DLA Land and Maritime
Patricia S. Dupuis, Raytheon Company	Thomas Dale Murry, Rockwell Collins	Andy Slade, Rogers Corporation
Theodore Edwards, Dynaco Corp.	Christopher G. Olson, Rockwell Collins	Dan Welch, Arlon Materials for Electronics
Gary M. Ferrari, FTG Circuits	William A. Ortloff, Raytheon Company	
Ty Gragg, Unicircuit Inc.		

This Page Intentionally Left Blank

# Table of Contents

<b>1</b>	<b>SCOPE</b>	1	3.2.3	Other Dielectric Materials	7
1.1	Scope	1	3.2.4	Metal Foils	7
1.2	Purpose	1	3.2.5	Metal Core/Backed	7
1.3	Performance Classification and Types	1	3.2.6	Base Metallic Plating Depositions and Conductive Coatings	7
1.3.1	Classifications	1	3.2.7	Final Finish Depositions and Coatings — Metallic and Non-Metallic	8
1.3.2	Printed Board Type	1	3.2.8	Polymer Coating (Solder Mask)	10
1.3.3	Selection for Procurement	1	3.2.9	Fusing Fluids and Fluxes	10
1.3.4	Material, Plating Process and Final Finish	3	3.2.10	Marking Inks	10
1.4	Terms and Definitions	3	3.2.11	Hole Fill Insulation Material	10
1.4.1	White Spots	3	3.2.12	Metal and/or Composite, External	10
1.4.2	Hybrid (Composite) Printed Board	3	3.2.13	Via Protection	10
1.4.3	As Agreed Between User and Supplier (AABUS)	4	3.2.14	Embedded Passive Materials	11
1.5	Interpretation “Shall,”	4	3.3	Visual	11
1.6	Presentation	4	3.3.1	Edges of Microwave Printed Boards	11
1.7	Revision Level Changes	4	3.3.2	Laminate Imperfections	11
1.8	Master Drawing	4	3.3.3	Plating and Coating Voids in the Hole	11
<b>2</b>	<b>APPLICABLE DOCUMENTS</b>	4	3.3.4	Lifted Lands	11
2.1	IPC	4	3.3.5	Marking	12
2.2	Joint Industry Standards	5	3.3.6	Solderability	12
2.3	Federal	6	3.3.7	Plating Adhesion	12
2.4	American Society for Testing and Materials	6	3.3.8	Edge Printed Board Contact, Junction of Gold Plate to Solder Finish	12
2.5	Underwriters Lab	6	3.3.9	Workmanship	12
2.6	National Electrical Manufacturers Association	6	3.4	Printed Board Dimensional Requirements	13
2.7	American Society for Quality	6	3.4.1	Hole Size, Hole Pattern Accuracy, Pattern Feature Accuracy and Slots	13
2.8	AMS	6	3.4.2	Annular Ring and Breakout (External)	13
2.9	American Society of Mechanical Engineers	6	3.4.3	Bow and Twist	14
<b>3</b>	<b>REQUIREMENTS</b>	6	3.5	Conductor Definition	15
3.1	General	6	3.5.1	Undercutting	15
3.2	Materials Used in this Specification	6	3.5.2	Conductor Widths and Thicknesses and Spacing	15
3.2.1	Laminates and Bonding Material for Multilayer or Mixed Dielectric Printed Boards	6	3.5.3	Conductive Surfaces	16
3.2.2	External Bonding Materials	7			



Figure 3-15	Measurement Locations for PTFE Resin Smear . . . . .	22	Table 3-5	Surface and Hole Copper Plating Minimum Requirements for Buried via cores (2 layers) . . . . .	10
Figure 3-16	Negative Etchback . . . . .	22	Table 3-6	Plating and Coating Voids Visual Examination. . . . .	11
Figure 3-17	Annular Ring Measurement (Internal) . . . . .	23	Table 3-7	Edge Board Contact Gap. . . . .	12
Figure 3-18	Microsection Rotations for Breakout Detection. . . . .	23	Table 3-8	Minimum Annular Ring . . . . .	14
Figure 3-19	Comparison of Microsection Rotations . . . . .	23	Table 3-9	Maximum Percent of Allowable Conductor Width Deviations. . . . .	15
Figure 3-20	Surface Copper Wrap measurement . . . . .	24	Table 3-10	Percent of Allowable Conductor Space Deviations . . . . .	16
Figure 3-21	Wrap Copper in Type 4 Printed Board (Acceptable) . . . . .	24	Table 3-11	Percent of Allowable Conductor Width Reduction Caused By Pin Holes . . . . .	16
Figure 3-22	Wrap Copper Removed by Excessive Sanding/Planarization (Not Acceptable). . . . .	24	Table 3-12	Percent of Reduction In Dielectric Material Thickness. . . . .	16
Figure 3-23	Copper Cap Thickness . . . . .	25	Table 3-13	Plated-Through Hole Integrity After Stress. . . . .	19
Figure 3-24	Copper Cap Filled Via Height (Bump) . . . . .	25	Table 3-14	Cap Plating Requirements . . . . .	25
Figure 3-25	Copper Cap Depression (Dimple). . . . .	25	Table 3-15	Internal Layer Foil Thickness after Processing. . . . .	26
Figure 3-26	Copper Cap Plating Voids. . . . .	25	Table 3-16	External Conductor Thickness after Plating . . . . .	26
Figure 3-27	Metal Core to PTH Spacing . . . . .	27	Table 3-17	Solder Mask Adhesion. . . . .	28
Figure 3-28	Measurement of Minimum Dielectric Spacing. . . . .	27	Table 3-18	Dielectric Withstanding Voltages . . . . .	29
<b>Tables</b>					
Table 1-1	Default Requirements . . . . .	2	Table 3-19	Insulation Resistance . . . . .	29
Table 1-2	Technology Adder Examples. . . . .	2	Table 4-1	Qualification Test Coupons . . . . .	32
Table 3-1	Metal Core Substrate. . . . .	7	Table 4-2	C=0 Sampling Plan(Sample Size for Specific Index Value). . . . .	33
Table 3-2	Final Finish and Coating Requirements . . . . .	9	Table 4-3	Acceptance Testing and Frequency . . . . .	33
Table 3-3	Surface and Hole Copper Plating Minimum Requirements for Buried Vias > 2 Layers, Through-Holes, and Blind Vias. . . . .	10	Table 4-4	Quality Conformance Testing . . . . .	37
Table 3-4	Surface and Hole Copper Plating Minimum Requirements for Microvias (Blind and Buried). . . . .	10	Table A.1	Class 3/A Supplemental Requirements . . . . .	38

This Page Intentionally Left Blank

# Qualification and Performance Specification for High Frequency (Microwave) Printed Boards

## 1 SCOPE

**1.1 Scope** This specification covers end product inspection and test of high frequency (microwave) printed boards for microstrip, stripline, mixed dielectric and multilayer stripline applications with or without buried/blind vias, and metal cores.

The printed board may contain embedded active or passive circuitry with distributive capacitive planes, capacitive or resistive components conforming to IPC-6017. The printed board may contain build up High Density Interconnect (HDI) layers conforming to IPC-6016.

**1.2 Purpose** The purpose of this specification is to provide requirements for qualification and performance of high frequency (Microwave) printed boards.

### 1.3 Performance Classification and Types

**1.3.1 Classifications** This specification establishes acceptance criteria for the performance classification of high frequency printed boards based on customer and/or end-use requirements. Printed boards are classified by one of three general Performance Classes as defined in IPC-6011.

**1.3.1.1 Requirement Deviations** Requirements deviating from these heritage classifications **shall** be as agreed between user and supplier (AABUS).

**1.3.1.2 Space and Military Avionics Deviations** Space and Military Avionics performance classification deviations are defined and listed in Appendix A of this specification. These are commonly referred to as Class 3/A.

**1.3.2 Printed Board Type** This specification will define eight types of high frequency (microwave) printed boards.

*Type 1* — Single Sided

*Type 2* — Double Sided

*Type 3* — Homogeneous Dielectric Multilayer Construction

*Type 4* — Mixed Dielectric Multilayer

*Type 5* — Homogeneous Dielectric Multilayer with blind and/or buried vias

*Type 6* — Mixed Dielectric Multilayer with blind and/or buried vias

*Type 7* — Metal and/or composite backed printed boards, single sided or double sided

*Type 8* — Multilayer metal and/or composite backed or core printed boards with or without blind and/or buried vias

**1.3.3 Selection for Procurement** For procurement purposes, Performance Class **shall** be specified in the procurement documentation.

The documentation **shall** provide sufficient information to the supplier so that he can fabricate the printed board and ensure that the user receives the desired product. Information that should be included in the procurement documentation is shown in IPC-D-325.

The procurement documentation should specify the thermal stress test method to be used to meet the requirement of 3.6.1. Selection **shall** be from those depicted in 3.6.1.1, 3.6.1.2 and 3.6.1.3. If not specified (see 6.1), the default **shall** be per Table 1-1.

During the selection process, the user should take into consideration the following when determining the appropriate thermal stress test method:

- Wave solder, selective solder, hand solder assembly processes (see 3.6.1.1)
- Conventional (eutectic) reflow processes (see 3.6.1.2)
- Lead-free reflow processes (see 3.6.1.3)

**1.3.3.1 Selection (Default)** The procurement documentation should specify the requirements that can be selected within this specification. Refer to Table 1-1 for a listing of default requirements.