


**IPC/JEDEC J-STD-033C**  
**February 2012**  
Supersedes IPC/JEDEC J-STD-033B  
Includes Amendment 1  
October 2005

# ***JOINT INDUSTRY STANDARD***

Handling, Packing,  
Shipping and Use of  
Moisture/Reflow  
Sensitive Surface  
Mount Devices

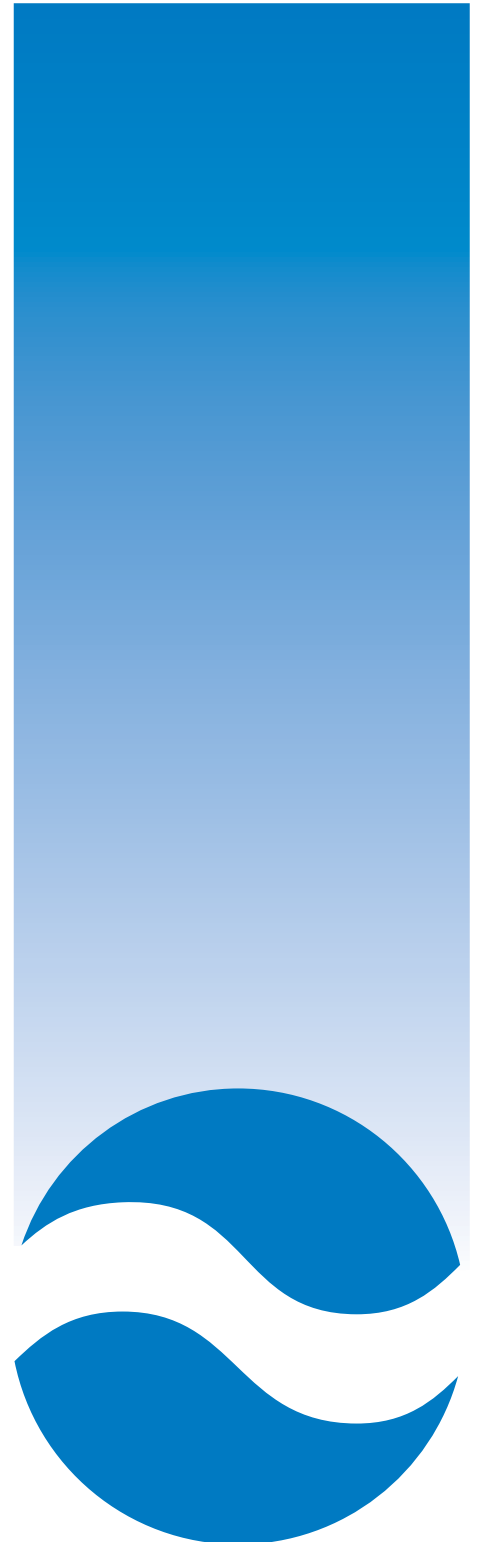

---

**Notice**

JEDEC and IPC Standards and Publications are designed to serve the public interest through eliminating misunderstandings between manufacturers and purchasers, facilitating interchangeability and improvement of products, and assisting the purchaser in selecting and obtaining with minimum delay the proper product for his particular need. Existence of such Standards and Publications shall not in any respect preclude any member or nonmember of JEDEC or IPC from manufacturing or selling products not conforming to such Standards and Publications, nor shall the existence of such Standards and Publications preclude their voluntary use by those other than JEDEC and IPC members, whether the standard is to be used either domestically or internationally.

Recommended Standards and Publications are adopted by JEDEC and IPC without regard to whether their adoption may involve patents on articles, materials, or processes. By such action, JEDEC and IPC do not assume any liability to any patent owner, nor do they assume any obligation whatever to parties adopting the Recommended Standard or Publication. Users are also wholly responsible for protecting themselves against all claims of liabilities for patent infringement.

The material in this joint standard was developed by the JEDEC JC-14.1 Committee on Reliability Test Methods for Packaged Devices and the IPC Plastic Chip Carrier Cracking Task Group (B-10a)

*For Technical Information Contact:*

**JEDEC**  
**Solid State Technology Association**  
3103 North 10th Street, Suite 240-S  
Arlington, VA 22201-2107  
Tel 703 907.0026  
Fax 703 907.7501

**IPC**  
3000 Lakeside Drive, Suite 309S  
Bannockburn, Illinois  
60015-1249  
Tel 847 615.7100  
Fax 847 615.7105

Please use the Standard Improvement Form shown at the end of this document.



IPC/JEDEC J-STD-033C

# Handling, Packing, Shipping and Use of Moisture/Reflow Sensitive Surface Mount Devices

A joint standard developed by the JEDEC JC-14.1 Committee on Reliability Test Methods for Packaged Devices and the B-10a Plastic Chip Carrier Cracking Task Group of IPC

**Supersedes:**

IPC/JEDEC J-STD-033B.1  
includes Amendment 1 -  
January 2007  
IPC/JEDEC J-STD-033B -  
October 2005  
IPC/JEDEC J-STD-033A -  
July 2002  
IPC/JEDEC J-STD-033 -  
April 1999  
JEDEC JEP124  
IPC-SM-786A - January 1995  
IPC-SM-786 - December 1990

Users of this standard are encouraged to participate in the development of future revisions.

Contact:

**JEDEC**  
**Solid State Technology Association**  
3103 North 10th Street, Suite 240-S  
Arlington, VA 22201-2107  
Tel 703 907.0026  
Fax 703 907.7501

**IPC**  
3000 Lakeside Drive, Suite 309S  
Bannockburn, Illinois  
60015-1249  
Tel 847 615.7100  
Fax 847 615.7105

This Page Intentionally Left Blank

## Acknowledgment

Members of the Joint IPC/JEDEC Moisture Classification Task Group have worked to develop this document. We would like to thank them for their dedication to this effort. Any standard involving a complex technology draws material from a vast number of sources. While the principal members of the Joint Moisture Classification Working Group are shown below, it is not possible to include all of those who assisted in the evolution of this Standard. To each of them, the members of the JEDEC and IPC extend their gratitude.

---

### IPC Plastic Chip Carrier Cracking Task Group, B-10a

Chairman  
Steven Martell  
Sonoscan, Inc.

### JEDEC JC 14.1 Committee

Chairman  
Jack McCullen  
Intel Corporation

### JEDEC JC 14

Chairman  
Nick Lycoudes  
Freescale Semiconductor

---

### Joint Working Group Members

Doug Derry, AccuAssembly  
Ranjit Gannamani, Advanced Micro Devices  
Joseph Smetana, Alcatel-Lucent  
Russell Nowland, Alcatel-Lucent  
Bradley Smith, Allegro MicroSystems Inc.  
Maurice Brodeur, Analog Devices Inc.  
Bill Strachan, ASTA - Portsmouth University  
Lyle Burhenn, BAE Systems Platform Solutions  
Mary Bellon, Boeing Research & Development  
Tim Chaudhry, Broadcom Corporation  
Glenn Koscal, Carsem  
Kevin Weston, Celestica  
Jasbir Bath, Christopher Associates Inc.  
Francois Monette, Cogiscan Inc.  
Erich Goertler, Continental Automotive GmbH  
Michael Blazier, Delphi Electronics and Safety  
Michael Pepples, Delphi Electronics and Safety  
Stuart Longgood, Delphi Electronics and Safety  
David Gaydos, DLG Technical Engineering  
Joanne Shipe, DSM Engineering Plastics  
Ralph Justus, EIA - Electronic Industries Alliance  
Glenn Dearing, Endicott Interconnect Technologies Inc

Dongkai Shangguan, Flextronics International  
Nicholas Lycoudes, Freescale Semiconductor  
Deepak Pai, General Dynamics Info. Sys., Inc  
Gergely Csohany, Harman/Becker Automotive Systems Kft.  
Srinivas Chada, Henkel Corporation  
Keith Newman, Hewlett-Packard Company  
Jennie Hwang, H-Technologies Group  
Charles Reynolds, IBM Corporation  
Mario Interrante, IBM Corporation  
Paul Krystek, IBM Corporation  
Curtis Grosskopf, IBM Corporation  
James Maguire, Intel Corporation  
Jack McCullen, Intel Corporation  
Mark Kwoka, Intersil Corporation  
Kerry Oren, ITT  
Quyen Chu, Jabil Circuit, Inc.  
Marty Rodriguez, Jabil Circuit, Inc. (HQ)  
Girish Wable, Jabil Circuit, Inc. (HQ)  
Julie Carlson, JEDEC  
Ken McGhee, JEDEC  
Akikazu Shibata, JPCA-Japan Electronics Packaging and Circuits Association  
Leland Woodall, Keihin Carolina System Technology  
Leo Feinstein, Leo Feinstein Associates  
James Mark Bird, MBird and Associates

Kurk Kan, Murata Power Solutions, Inc.  
Paul Melville, NXP Semiconductors  
John Burke, Optichron Inc.  
Heidi Reynolds, Oracle America, Inc.  
Mumtaz Bora, Peregrine Semiconductor  
Arnold Offner, Phoenix Contact  
Timothy Pitsch, Plexus Corporation  
Elvira Preecha, Qualcomm Inc.  
Richard Iodice, Raytheon Company  
James Robbins, Raytheon Company  
Jeff Shubrooks, Raytheon Company  
Christian Klein, Robert Bosch GmbH  
Scott Anson, Rochester Institute of Technology  
Michelle Ogihara, Seika Machinery Inc.  
Francis Classe, Spansion  
Brent Beamer, Static Control Components, Inc.  
Raymond Cirimele, STI Electronics, Inc.  
Christine Blair, STMicroelectronics Inc.  
Amol Kirtikar, Sud-Chemie Inc. Performance Packaging  
Michelle Martin, Sud-Chemie Performance Package  
Robert DiMaggio, Sud-Chemie Performance Package  
Larry Nye, Texas Instruments Inc.  
Joseph Thomas, ZN Technologies  
James Whitehouse

This Page Intentionally Left Blank

# Table of Contents

<b>1 FOREWORD</b> .....	1	3.3.2 Materials .....	4
1.1 Purpose .....	1	3.3.3 Labels .....	6
1.2 Scope .....	1	3.3.4 Moisture Barrier Bag Sealing .....	6
1.3 Assembly Processes .....	1	3.3.5 Dry-Pack Precautions .....	6
1.3.1 Mass Reflow .....	1	3.3.6 Shelf Life .....	7
1.3.2 Localized Heating .....	1	<b>4 DRYING</b> .....	7
1.3.3 Socketed Components .....	1	4.1 Post Exposure to Factory Ambient .....	7
1.3.4 Point-to-Point Soldering .....	1	4.1.1 Any Duration Exposure .....	7
1.3.5 Aqueous Cleaning .....	1	4.1.2 Short Duration Exposure .....	10
1.4 Reliability .....	2	4.2 General Considerations for Baking .....	10
1.5 Terms and Definitions .....	2	4.2.1 High Temperature Carriers .....	10
1.5.1 Active Desiccant .....	2	4.2.2 Low Temperature Carriers .....	10
1.5.2 Bar Code Label .....	2	4.2.3 Paper and Plastic Container Items .....	10
1.5.3 Bulk Reflow .....	2	4.2.4 Bakeout Times .....	10
1.5.4 Carrier .....	2	4.2.5 ESD Protection .....	10
1.5.5 Desiccant .....	2	4.2.6 Reuse of Carriers .....	10
1.5.6 Floor Life .....	2	4.2.7 Solderability Limitations .....	10
1.5.7 Humidity Indicator Card (HIC) .....	2	<b>5 USE</b> .....	11
1.5.8 Manufacturer's Exposure Time (MET) .....	2	5.1 Incoming Bag Inspection .....	11
1.5.9 Moisture-Barrier Bag (MBB) .....	2	5.1.1 Upon Receipt .....	11
1.5.10 Moisture-Sensitive Identification (MSID) .....	2	5.1.2 Component Inspection .....	11
1.5.11 Rework .....	2	5.2 Floor Life .....	11
1.5.12 Shelf Life .....	2	5.3 Safe Storage .....	11
1.5.13 SMD .....	2	5.3.1 Dry Pack .....	11
1.5.14 Solder Reflow .....	2	5.3.2 Shelf Life .....	11
1.5.15 Water Vapor Transmission Rate (WVTR) .....	3	5.3.3 Dry Atmosphere Cabinet .....	11
<b>2 APPLICABLE DOCUMENTS (Normative)</b> .....	3	5.4 Reflow .....	12
2.1 American Society for Testing and Materials (ASTM) .....	3	5.4.1 Opened MBB .....	12
2.2 Electronic Industries Alliance (EIA, JEDEC) ....	3	5.4.2 Reflow Temperature Extremes .....	12
2.3 IPC Standards .....	3	5.4.3 Additional Thermal Profile Parameters .....	12
2.4 Joint Industry Standards .....	3	5.4.4 Multiple Reflow Passes .....	12
2.5 Department of Defense .....	3	5.4.5 Maximum Reflow Passes .....	12
<b>3 DRY PACKING</b> .....	3	5.5 Drying Indicators .....	12
3.1 Requirements .....	3	5.5.1 Excess Humidity in the Dry Pack .....	12
3.2 Drying of SMD Packages and Carrier Materials Before Being Sealed in MBBs .....	3	5.5.2 Floor Life or Ambient Temperature/ Humidity Exceeded .....	13
3.2.1 Drying Requirements - Levels 2a - 5a .....	3	5.5.3 Level 6 SMD Packages .....	13
3.2.2 Drying Requirements for Carrier Materials .....	4	<b>6 BOARD REWORK</b> .....	13
3.2.3 Drying Requirements .....	4	6.1 Component Removal, Rework, and Remount ..	13
3.2.4 Excess Time Between Bake and Bag .....	4	6.1.1 Removal for Failure Analysis .....	13
3.3 Dry Pack .....	4	6.1.2 Removal and Remount .....	13
3.3.1 Description .....	4	6.2 Baking of Populated Boards .....	13

**7 DERATING DUE TO FACTORY ENVIRONMENTAL CONDITIONS** ..... 13

**APPENDIX A Test Method for Humidity Indicator Card used with Electronic Component Packaging** ..... 15

**APPENDIX B Derivation of Bake Tables** ..... 16

**APPENDIX C Changes in J-STD-033C** ..... 17

**Figures**

Figure 3-1 Typical Dry-Pack Configuration for Moisture-Sensitive SMD Packages in Shipping Tubes ..... 4

Figure 3-2 Humidity Indicator Card (HIC) (Example) ..... 5

Figure 3-3 Moisture-Sensitive Identification Label (Example) ..... 6

Figure 3-4 Moisture-Sensitive Caution Label (Example) ..... 6

Figure 3-5 MBB with No Evacuation (Example) ..... 7

Figure 3-6 MBB with Recommended Light Air Evacuation (Example) ..... 7

Figure 3-7 MBB with Too Much (Full) Evacuation (Example) ..... 7

Figure A-1 Photo of Testing Apparatus ..... 15

**Tables**

Table 3-1 Dry Packing Requirements ..... 4

Table 3-2 Typical HIC Spot Compliance ..... 6

Table 4-1 Reference Conditions for Drying Mounted or Unmounted SMD Packages (User Bake: Floor life begins counting at time = 0 after bake) ..... 8

Table 4-2 Default Baking Times Used Prior to Dry-Pack that were Exposed to Conditions ≤60% RH (MET = 24 h) ..... 9

Table 4-3 Resetting or Pausing the “Floor Life” Clock at User Site ..... 9

Table 5-1 Moisture Classification Level and Floor Life ..... 11

Table 7-1 Recommended Equivalent Total Floor Life (days) @ 20 °C, 25 °C & 30 °C, 35 °C For ICs with Novolac, Biphenyl and Multifunctional Epoxies (Reflow at same temperature at which the component was classified) Maximum Percent Relative Humidity ..... 14

# Handling, Packing, Shipping, and Use of Moisture/ Reflow and/or Process Sensitive Components

---

## 1 FOREWORD

The advent of surface mount devices (SMDs) introduced a new class of quality and reliability concerns regarding damage from the solder reflow process, such as cracks and delamination. This document describes the standardized levels of floor-life exposure for moisture/reflow sensitive SMDs along with the handling, packing, and shipping requirements necessary to avoid moisture/reflow related failures. Companion documents J-STD-020 and J-STD-075 define the classification procedure and JEP113 defines the labeling requirements.

For moisture sensitivity, moisture from atmospheric humidity enters permeable packaging materials by diffusion. Assembly processes used to solder SMDs to printed circuit boards (PCBs) expose the entire package body to temperatures higher than 200 °C. During solder reflow, the combination of rapid moisture expansion, materials mismatch, and material interface degradation can result in cracking and/or delamination of critical interfaces within the device.

Typical solder reflow processes of concern for all devices are infrared (IR), convection/IR, convection, vapor phase reflow (VPR), hot air rework tools, and wave solder, including full immersion.

Non-semiconductor devices may exhibit additional process sensitivities beyond moisture sensitivity such as thermal sensitivity, flux sensitivity, or cleaning process sensitivity.

**1.1 Purpose** The purpose of this document is to provide manufacturers and users with standardized methods for handling, packing, shipping, and use of moisture/reflow and process sensitive devices that have been classified to the levels defined in J-STD-020 or J-STD-075. These methods are provided to avoid damage from moisture absorption and exposure to solder reflow temperatures that can result in yield and reliability degradation. By using these procedures, safe and damage-free reflow can be achieved. The dry-packing process defined herein provides a minimum shelf life of 12 months from the seal date.

**1.2 Scope** This standard applies to all devices subjected to bulk solder reflow processes during PCB assembly, including plastic encapsulated packages, process sensitive devices, and other moisture sensitive devices made with moisture-permeable materials (epoxies, silicones, etc.) that are exposed to the ambient air.

### 1.3 Assembly Processes

**1.3.1 Mass Reflow** This standard applies to bulk solder reflow assembly by infrared (IR), convection/IR, convection, and vapor phase reflow (VPR) processes. It does not apply to bulk solder reflow processes that immerse the component bodies in molten solder (e.g., wave soldering bottom mounted components). Such processes are not allowed for many SMDs and are not covered by the component qualifications standards used as a basis for this document.

**1.3.2 Localized Heating** This standard also applies to moisture/reflow sensitive SMD packages that are removed or attached singly by local ambient heating, i.e., hot air rework. (Refer to Clause 6.)

**1.3.3 Socketed Components** This standard does not apply to SMD packages that are socketed and not exposed to solder reflow temperatures during either bulk reflow or rework of adjacent devices. Such SMD packages are not at risk and do not require moisture precautionary handling.

**1.3.4 Point-to-Point Soldering** This standard does not apply to SMD packages in which only the leads are heated to reflow the solder (e.g., hand-soldering, hot bar attach of gull wing leads, and through hole by wave soldering). The heat absorbed by the package body from such operations is typically much lower than for bulk surface mount reflow or hot air rework and moisture precautionary measures are typically not needed.

**1.3.5 Aqueous Cleaning** For non-cavity SMDs, typical short term aqueous cleaning processes will not impact the floor life (internal moisture content). Special consideration should be given to non-hermetic cavity packages.