


PAS 300:2015

Civilian armoured vehicle –
Test methods for ballistic and
blast protection

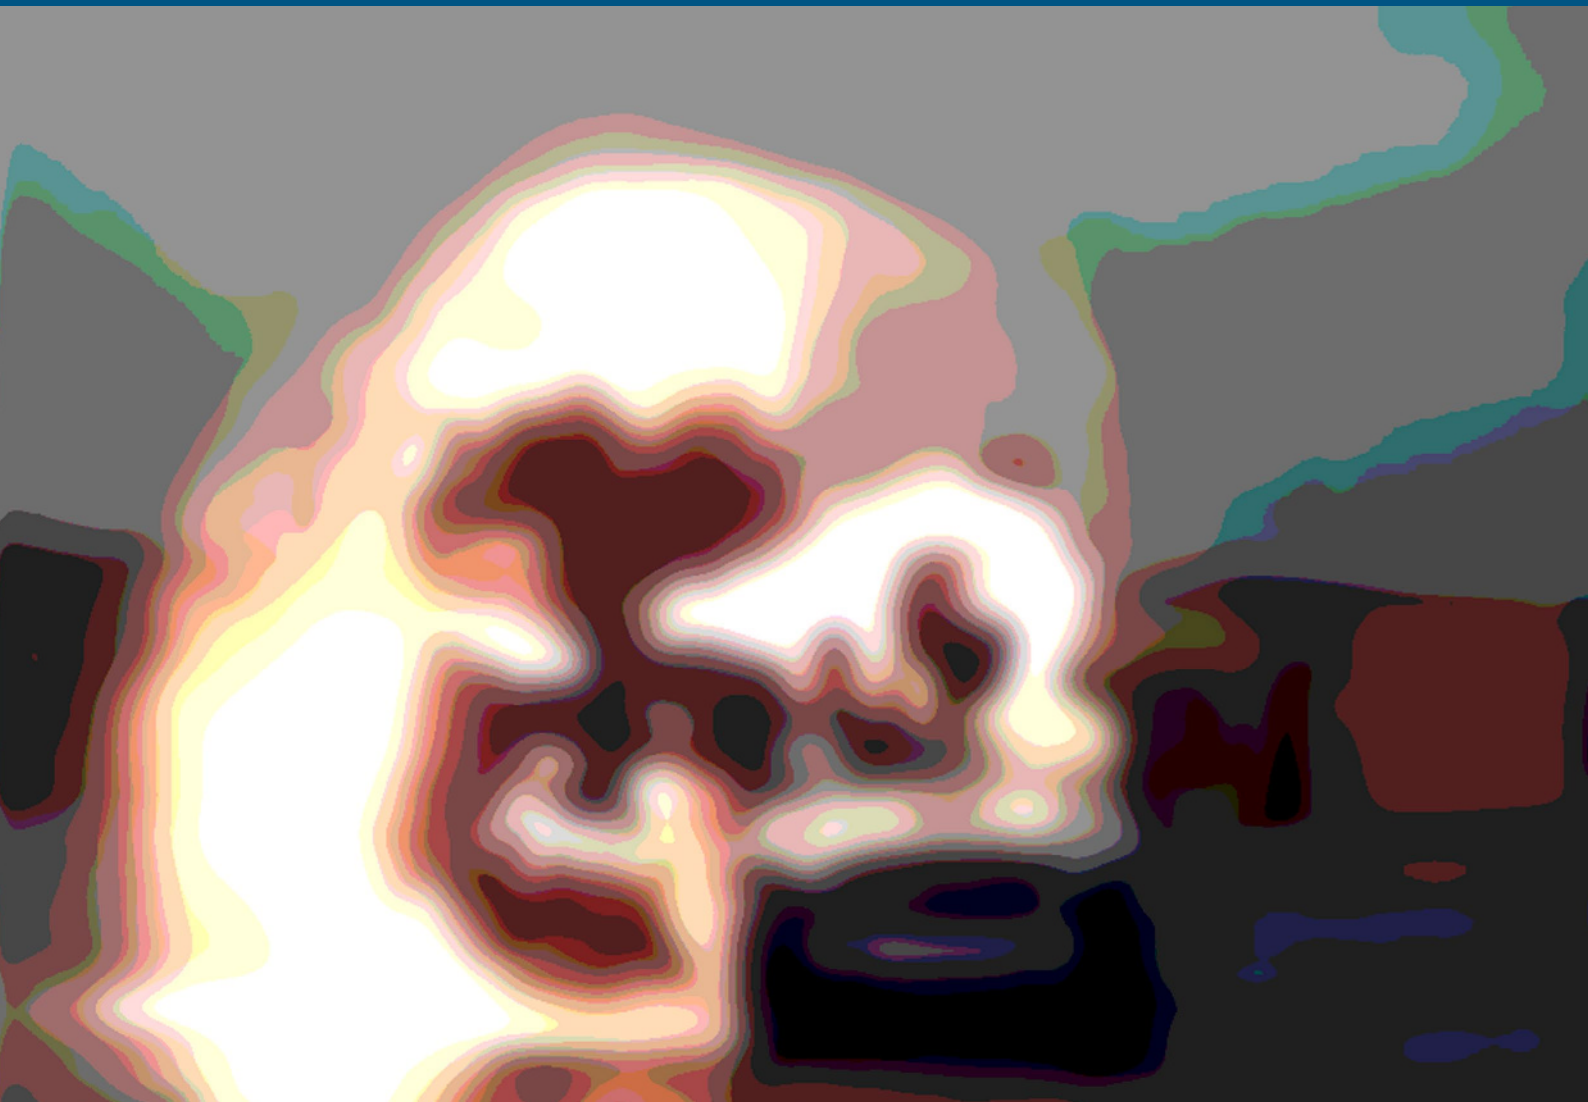

Publishing and copyright information

The BSI copyright notice displayed in this document indicates when the document was last issued.

© The British Standards Institution 2015.

Published by BSI Standards Limited 2015.

ISBN 978 0 580 83121 8

ICS 03.220.99, 13.230, 43.160

Publication history

First published March 2015

No copying without BSI permission except as permitted by copyright law.

Contents

Foreword	iii
Introduction	iv
1 Scope	1
2 Terms, definitions and abbreviations	1
3 Ballistic (BA) test method	4
4 Side blast (SB) test method	14
5 Under vehicle (UB) blast test method	19
6 Roof blast (RB) test method	22
Annexes	
Annex A (informative) Common ballistic standards	25
Annex B (informative) Ballistic shot plan – test log	26
Annex C (normative) Side blast (SB) surrogate test device specification	28
Annex D (normative) Explosive equivalency	29
Annex E (informative) Pressure data filters	32
Annex F (informative) Blast test log	35
Annex G (normative) Chest wall velocity predictor	37
Annex H (normative) Design threat grenade DTG5	39
Annex I (normative) Valid shot determination	44
List of figures	
Figure 1 – Testing process	iv
Figure 2 – Shot zones for saloon type CAV	8
Figure 3 – Shot zones for SUV type CAV	9
Figure 4 – Minimum requirement for attack angles	10
Figure 5 – Side blast (SB) test setup	16
Figure 6 – Pressure transducer placement in mm	17
Figure C.1 – Side blast (SB) test device specification	28
Figure D.1 – Example incident static overpressure time histories, 12 kg C4 (cube) at 8.0 m	31
Figure D.2 – Example positive impulse time histories, 12 kg C4 (cube) at 8.0 m	31
Figure E.1 – Pressure time history, 12 kg C4 (cube) at 8.0 m	32
Figure E.2 – Spectral analysis, 12 kg C4 (cube) at 8.0 m	33
Figure E.3 – Pressure time history recorded from same incident static overpressure transducer with different sample rates and low pass filters	34
Figure G.1 – Axelsson, Yelverton model (70 kg body)	37
Figure H.1 – Fragment energy density, M67, HG85, DTG5	40
Figure H.2 – DTG5 drawings	40
Figure H.3 – Example DTG5	42
Figure H.4 – Validation test set up	42
Figure H.5 – DTG5 validation test example result	43

List of tables

Table 1 – Ballistic (BA) test levels	5
Table 2 – Fragment (FR) test levels	6
Table 3 – Fragment measured velocity test levels	6
Table 4 – Ballistic (BA) test pass/fail criteria	13
Table 5 – Side blast (SB) test levels	14
Table 6 – DAS specification	14
Table 7 – Pressure transducer specification	15
Table 8 – Side blast (SB) pass/fail criteria	18
Table 9 – Under vehicle (UB) blast test levels	19
Table 10 – Under vehicle (UB) blast test device placement	20
Table 11 – Under vehicle (UB) blast pass/fail criteria	21
Table 12 – Roof blast (RB) test levels	22
Table 13 – Roof blast (RB) test device placement	23
Table 14 – Roof blast (RB) pass/fail criteria	24
Table A.1 – Common ballistic test levels	25
Table B.1 – Ballistic shot plan – test log	26
Table B.2 – Ballistic test pass/fail criteria	27
Table D.1 – 12 kg C4 at 8.0 m stand-off, peak incident static overpressure and positive impulse	30
Table F.1 – Blast test log	35
Table F.2 – CAV internal blast pressure (CWVP) pass/fail criteria	36
Table F.3 – Side blast (SB) fragment hazard pass/fail criteria	36
Table F.4 – Under vehicle blast (UB) fragment hazard pass/fail criteria ..	36
Table F.5 – Roof blast (RB) fragment hazard pass/fail criteria	36
Table G.1 – Injury models for non-auditory injury assessment	37
Table G.2 – Chest wall velocity predictor (CWVP) levels	38
Table I.1 – Shot validity criteria, specified limits and severity conditions	45

Foreword

This PAS was sponsored by the Centre for the Protection of National Infrastructure (CPNI). Its development was facilitated by BSI Standards Limited and it was published under licence from The British Standards Institution. It came into effect on 31 March 2015.

Acknowledgement is given to the technical author from the Metropolitan Police Service Special Projects, and to the following organizations that were involved in the development of this PAS as members of the steering group:

- Blastech Limited
- Defence Science and Technology Laboratory (DSTL)
- DJ Goode & Associates Limited
- G7 SME Limited
- Jankel Armouring Limited
- Millbrook Proving Ground Limited
- Penman Group Limited
- Phil Gotts Consulting Limited
- QinetiQ Limited
- Radnor Range Limited
- S. MacNeillie & Son Limited

Acknowledgement is also given to the members of a wider review panel who were consulted in the development of this PAS.

The British Standards Institution retains ownership and copyright of this PAS. BSI Standards Limited as the publisher of the PAS reserves the right to withdraw or amend this PAS on receipt of authoritative advice that it is appropriate to do so. This PAS will be reviewed at intervals not exceeding two years, and any amendments arising from the review will be published as an amended PAS and publicized in *Update Standards*.

This PAS is not to be regarded as a British Standard. It will be withdrawn upon publication of its content in, or as, a British Standard.

The PAS process enables a document to be rapidly developed in order to fulfil an immediate need in industry. A PAS can be considered for further development as a British Standard, or constitute part of the UK input into the development of a European or International Standard.

Relationship with other publications

The test methods described in this PAS were developed from the *VSAG 12 Part 2: Civilian armoured vehicles – Ballistic and blast testing handbook* [1] with kind permission from the Vehicle Security Advisory Group (VSAG).

Product testing. Users of this PAS are advised to consider the desirability of third-party testing of product conformity with this PAS. Users seeking assistance in identifying appropriate conformity assessment bodies or schemes may ask BSI to forward their enquiries to the relevant association.

Use of this document

It has been assumed in the preparation of this PAS that the execution of its provisions will be entrusted to appropriately qualified and experienced people, for whose use it has been produced.

Presentational conventions

The provisions of this specification are presented in roman (i.e. upright) type. Its requirements are expressed in sentences in which the principal auxiliary verb is "shall".

Commentary, explanation and general informative material is presented in italic type, and does not constitute a normative element.

Requirements in this standard are drafted in accordance with *Rules for the structure and drafting of UK standards*, subclause J.1.1, which states, "Requirements should be expressed using wording such as: 'When tested as described in Annex A, the product shall ...'". This means that only those products that are capable of passing the specified test will be deemed to conform to this specification.

Contractual and legal considerations

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a PAS cannot confer immunity from legal obligations.

Introduction

PAS 300 describes four test procedures that may be completed on a civilian armoured vehicle (CAV) to assess its performance against ballistic and blast levels. The test methods are set out in a manner to allow each test to be completed independently. If more than one test is required on a CAV then the test order followed is usually ballistics, side blast, under vehicle blast and then roof blast. One or multiple test vehicles may be used to complete testing assuming that all test vehicles are built to the same design specification being tested.


For each test, careful consideration is given to any damage sustained on the test vehicle. If there is a risk of compromising or invalidating any further testing then actions are taken to minimize this risk.

During any phase of testing it may become evident that the CAV design does not achieve a pass in accordance with the defined criteria set out in this PAS. In this situation the party requesting testing may be given the option to submit a redesign for retest. If this option is not taken the test vehicle receives a fail and the next phase of testing is conducted, if necessary.

The party requesting testing may withdraw at any time from further testing.

In line with current practice the tests may be completed with the minimum requirements set out in this PAS. The party conducting the tests seeks to test the most severe conditions. The testing process for this PAS is outlined in Figure 1 below.

Figure 1 – Testing process

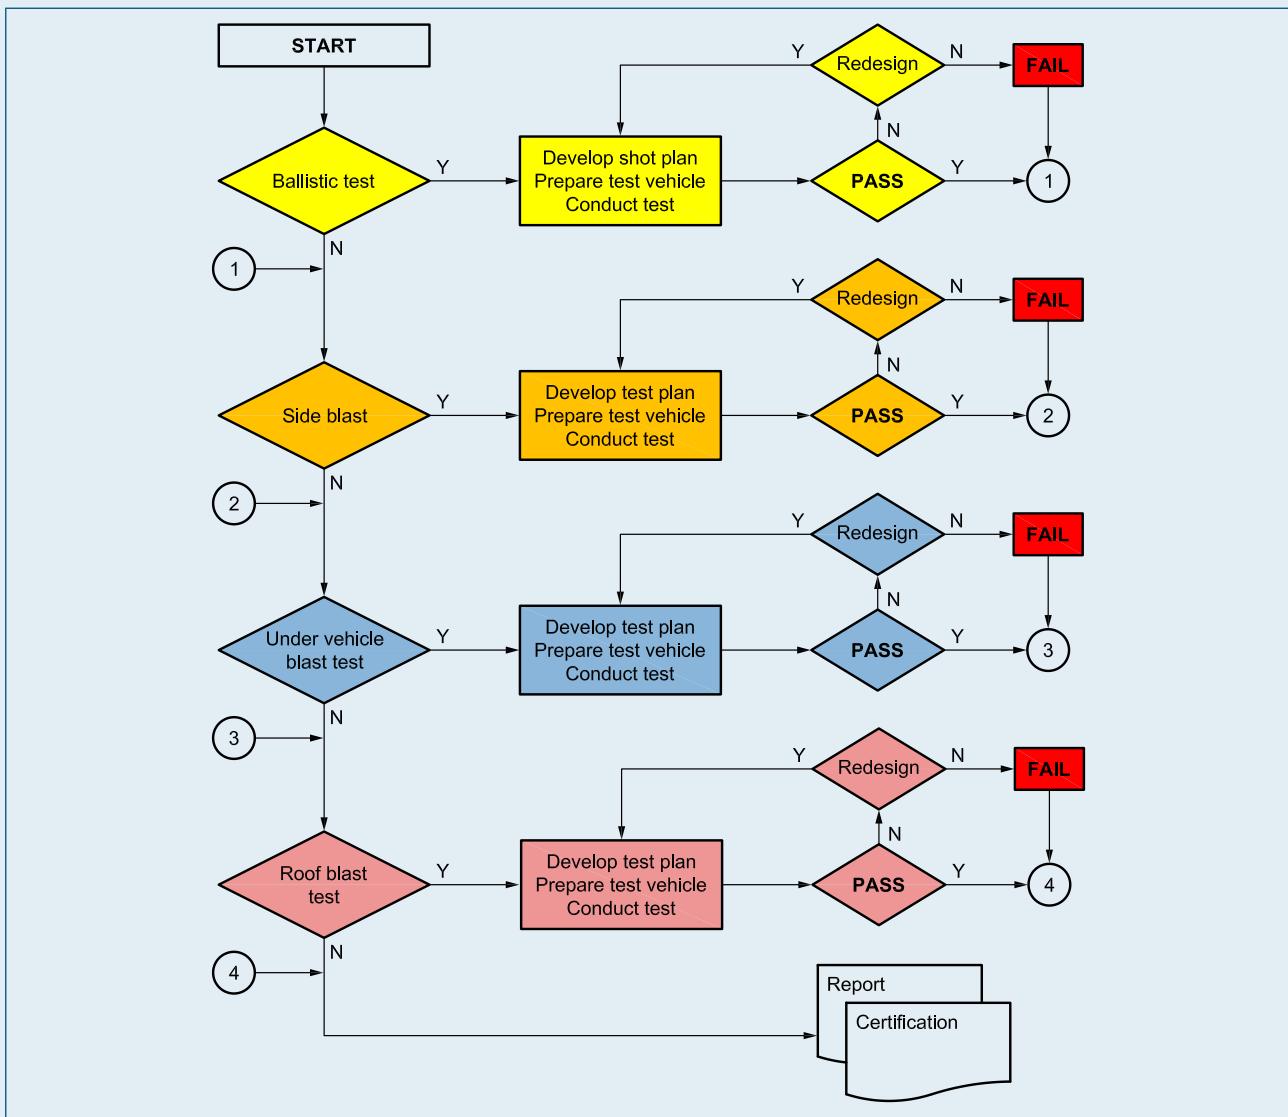

1 Scope

PAS 300 describes test methods for assessing the ballistic and/or blast performance of a civilian armoured vehicle (CAV).

This PAS defines test levels for ballistic impact (including handgun, shotgun and rifle), side blast, under vehicle blast and roof blast.

It also includes fragment simulating projectile (FSP) tests as part of the ballistic test.

2 Terms, definitions and abbreviations

2.1 Terms and definitions

For the purpose of this PAS the following terms and definitions apply.

2.1.1 armour shell

structure to protect the occupant space or critical components

NOTE For example engine parts, fuel tank, fuel lines, auxiliary battery or communication equipment.

2.1.2 attack angle

specified angle between the reference horizontal or vertical plane of the test vehicle (2.1.21) and trajectory of the test projectile (2.1.19)

2.1.3 chest wall velocity predictor (CWVP)

parameter used to assess the likelihood of injury in the human body from blast pressure

2.1.4 complete involuntary unlatching

vehicle door opens as a result of physical damage and/or loading, other than human intervention

2.1.5 data acquisition system (DAS)

equipment used to record experimental data

2.1.6 firing system

weapon or equipment that is capable of achieving the specified test levels

NOTE See Table 1 for ballistic (BA) test levels.

2.1.7 fragment

2.1.7.1 primary fragment

fragment from the test device

NOTE For example, grenade casing fragments.

2.1.7.2 secondary fragment

fragment that might detach from the test vehicle and enter the occupant space

NOTE For example, armour spalling, or heavy, light and soft parts from the test vehicle.