

FINAL VERSION

VERSION FINALE



**Digital addressable lighting interface –
Part 102: General requirements – Control gear**

**Interface d'éclairage adressable numérique –
Partie 102: Exigences générales – Appareillages de commande**

CONTENTS

| | |
|---|----|
| FOREWORD..... | 7 |
| INTRODUCTION..... | 9 |
| 1 Scope..... | 11 |
| 2 Normative references | 11 |
| 3 Terms and definitions | 11 |
| 4 General..... | 14 |
| 4.1 General..... | 14 |
| 4.2 Version number..... | 14 |
| 5 Electrical specification | 15 |
| 6 Interface power supply..... | 15 |
| 7 Transmission protocol structure | 15 |
| 7.1 General..... | 15 |
| 7.2 16 bit forward frame encoding | 15 |
| 7.2.1 General | 15 |
| 7.2.2 Address byte..... | 15 |
| 7.2.3 Opcode byte | 15 |
| 8 Timing..... | 16 |
| 9 Method of operation..... | 16 |
| 9.1 General..... | 16 |
| 9.2 Control gear..... | 16 |
| 9.2.1 General | 16 |
| 9.2.2 Control gear phases..... | 16 |
| 9.3 Dimming curve | 17 |
| 9.4 Calculating “ <i>targetLevel</i> ” | 20 |
| 9.5 Fading | 20 |
| 9.5.1 General | 20 |
| 9.5.2 Fade time | 21 |
| 9.5.3 Fade rate..... | 23 |
| 9.5.4 Extended fade time | 23 |
| 9.5.5 Using the fade time | 25 |
| 9.5.6 Using the fade rate..... | 25 |
| 9.5.7 System response to changes during a fade..... | 26 |
| 9.5.8 System response to changes during standby and startup | 26 |
| 9.5.9 Stopping a fade..... | 26 |
| 9.6 Min and max level | 26 |
| 9.7 Commands..... | 27 |
| 9.7.1 General | 27 |
| 9.7.2 Level instructions without fade | 28 |
| 9.7.3 Level instructions initiating a fade..... | 28 |
| 9.7.4 Configuration instructions..... | 28 |
| 9.7.5 Queries..... | 28 |
| 9.7.6 Special commands..... | 28 |
| 9.7.7 Application extended commands | 28 |
| 9.8 Command iterations | 28 |
| 9.8.1 General | 28 |

| | | |
|--------|---|----|
| 9.8.2 | Command iteration of “UP” and “DOWN” commands | 29 |
| 9.8.3 | DAPC SEQUENCE (deprecated) | 29 |
| 9.9 | Modes of operation | 30 |
| 9.9.1 | General | 30 |
| 9.9.2 | Operating mode 0x00: standard mode | 30 |
| 9.9.3 | Operating mode 0x01 to 0x7F: reserved | 30 |
| 9.9.4 | Operating mode 0x80 to 0xFF: manufacturer specific modes..... | 30 |
| 9.10 | Memory banks | 30 |
| 9.10.1 | General | 30 |
| 9.10.2 | Memory map..... | 31 |
| 9.10.3 | Selecting a memory bank location | 32 |
| 9.10.4 | Memory bank reading..... | 32 |
| 9.10.5 | Memory bank writing | 32 |
| 9.10.6 | Memory bank 0 | 33 |
| 9.10.7 | Memory bank 1 | 35 |
| 9.10.8 | Manufacturer specific memory banks..... | 37 |
| 9.10.9 | Reserved memory banks | 37 |
| 9.11 | Reset..... | 37 |
| 9.11.1 | Reset operation | 37 |
| 9.11.2 | Reset memory bank operation | 37 |
| 9.12 | System failure | 37 |
| 9.13 | Power on | 38 |
| 9.14 | Assigning short addresses..... | 39 |
| 9.14.1 | General | 39 |
| 9.14.2 | Random address allocation | 39 |
| 9.14.3 | Identification of a device | 40 |
| 9.14.4 | Direct address allocation..... | 41 |
| 9.15 | Failure state behaviour..... | 41 |
| 9.16 | Status information | 41 |
| 9.16.1 | General | 41 |
| 9.16.2 | Bit 0: Control gear failure | 41 |
| 9.16.3 | Bit 1: lamp failure..... | 42 |
| 9.16.4 | Bit 2: lamp on | 44 |
| 9.16.5 | Bit 3: limit error | 44 |
| 9.16.6 | Bit 4: fade running..... | 44 |
| 9.16.7 | Bit 5: reset state | 44 |
| 9.16.8 | Bit 6: missing short address | 44 |
| 9.16.9 | Bit 7: power cycle seen | 44 |
| 9.17 | Non-volatile memory | 45 |
| 9.18 | Device types and features | 45 |
| 9.19 | Using scenes | 46 |
| 10 | Declaration of variables | 47 |
| 11 | Definition of commands | 49 |
| 11.1 | General..... | 49 |
| 11.2 | Overview sheets | 49 |
| 11.3 | Level instructions | 54 |
| 11.3.1 | DAPC (<i>level</i>) | 54 |
| 11.3.2 | OFF | 54 |
| 11.3.3 | UP..... | 54 |

| | | |
|---------|--|----|
| 11.3.4 | DOWN | 54 |
| 11.3.5 | STEP UP | 54 |
| 11.3.6 | STEP DOWN | 55 |
| 11.3.7 | RECALL MAX LEVEL | 55 |
| 11.3.8 | RECALL MIN LEVEL | 55 |
| 11.3.9 | STEP DOWN AND OFF | 56 |
| 11.3.10 | ON AND STEP UP | 56 |
| 11.3.11 | ENABLE DAPC SEQUENCE | 56 |
| 11.3.12 | GO TO LAST ACTIVE LEVEL | 57 |
| 11.3.14 | CONTINUOUS UP | 57 |
| 11.3.15 | CONTINUOUS DOWN | 57 |
| 11.3.13 | GO TO SCENE (<i>sceneNumber</i>) | 57 |
| 11.4 | Configuration instructions | 57 |
| 11.4.1 | General | 57 |
| 11.4.2 | RESET | 57 |
| 11.4.3 | STORE ACTUAL LEVEL IN DTR0 | 58 |
| 11.4.4 | SAVE PERSISTENT VARIABLES | 58 |
| 11.4.5 | SET OPERATING MODE (<i>DTR0</i>) | 58 |
| 11.4.6 | RESET MEMORY BANK (<i>DTR0</i>) | 58 |
| 11.4.7 | IDENTIFY DEVICE | 59 |
| 11.4.8 | SET MAX LEVEL (<i>DTR0</i>) | 59 |
| 11.4.9 | SET MIN LEVEL (<i>DTR0</i>) | 59 |
| 11.4.10 | SET SYSTEM FAILURE LEVEL (<i>DTR0</i>) | 60 |
| 11.4.11 | SET POWER ON LEVEL (<i>DTR0</i>) | 60 |
| 11.4.12 | SET FADE TIME (<i>DTR0</i>) | 60 |
| 11.4.13 | SET FADE RATE (<i>DTR0</i>) | 60 |
| 11.4.14 | SET EXTENDED FADE TIME (<i>DTR0</i>) | 60 |
| 11.4.15 | SET SCENE (<i>DTR0, sceneX</i>) | 61 |
| 11.4.16 | REMOVE FROM SCENE (<i>sceneX</i>) | 61 |
| 11.4.17 | ADD TO GROUP (<i>group</i>) | 61 |
| 11.4.18 | REMOVE FROM GROUP (<i>group</i>) | 61 |
| 11.4.19 | SET SHORT ADDRESS (<i>DTR0</i>) | 62 |
| 11.4.20 | ENABLE WRITE MEMORY | 62 |
| 11.5 | Queries | 62 |
| 11.5.1 | General | 62 |
| 11.5.2 | QUERY STATUS | 62 |
| 11.5.3 | QUERY CONTROL GEAR PRESENT | 62 |
| 11.5.4 | QUERY CONTROL GEAR FAILURE | 62 |
| 11.5.5 | QUERY LAMP FAILURE | 62 |
| 11.5.6 | QUERY LAMP POWER ON | 62 |
| 11.5.7 | QUERY LIMIT ERROR | 63 |
| 11.5.8 | QUERY RESET STATE | 63 |
| 11.5.9 | QUERY MISSING SHORT ADDRESS | 63 |
| 11.5.10 | QUERY VERSION NUMBER | 63 |
| 11.5.11 | QUERY CONTENT DTR0 | 63 |
| 11.5.12 | QUERY DEVICE TYPE | 63 |
| 11.5.13 | QUERY NEXT DEVICE TYPE | 63 |
| 11.5.14 | QUERY PHYSICAL MINIMUM | 64 |
| 11.5.15 | QUERY POWER FAILURE | 64 |

| | | |
|-----------------------|--|----|
| 11.5.16 | QUERY CONTENT DTR1 | 64 |
| 11.5.17 | QUERY CONTENT DTR2 | 64 |
| 11.5.18 | QUERY OPERATING MODE | 64 |
| 11.5.19 | QUERY LIGHT SOURCE TYPE | 64 |
| 11.5.20 | QUERY ACTUAL LEVEL | 65 |
| 11.5.21 | QUERY MAX LEVEL | 65 |
| 11.5.22 | QUERY MIN LEVEL | 65 |
| 11.5.23 | QUERY POWER ON LEVEL | 65 |
| 11.5.24 | QUERY SYSTEM FAILURE LEVEL | 65 |
| 11.5.25 | QUERY FADE TIME/FADE RATE | 65 |
| 11.5.26 | QUERY EXTENDED FADE TIME | 65 |
| 11.5.27 | QUERY MANUFACTURER SPECIFIC MODE | 65 |
| 11.5.28 | QUERY SCENE LEVEL (<i>sceneX</i>) | 65 |
| 11.5.29 | QUERY GROUPS 0-7 | 66 |
| 11.5.30 | QUERY GROUPS 8-15 | 66 |
| 11.5.31 | QUERY RANDOM ADDRESS (H) | 66 |
| 11.5.32 | QUERY RANDOM ADDRESS (M) | 66 |
| 11.5.33 | QUERY RANDOM ADDRESS (L) | 66 |
| 11.5.34 | READ MEMORY LOCATION (<i>DTR1, DTR0</i>) | 66 |
| 11.6 | Application extended commands | 66 |
| 11.6.1 | General | 66 |
| 11.6.2 | QUERY EXTENDED VERSION NUMBER | 67 |
| 11.7 | Special commands | 67 |
| 11.7.1 | General | 67 |
| 11.7.2 | TERMINATE | 67 |
| 11.7.3 | DTR0 (<i>data</i>) | 67 |
| 11.7.4 | INITIALISE (<i>device</i>) | 67 |
| 11.7.5 | RANDOMISE | 68 |
| 11.7.6 | COMPARE | 68 |
| 11.7.7 | WITHDRAW | 68 |
| 11.7.8 | SEARCHADDRH (<i>data</i>) | 68 |
| 11.7.9 | SEARCHADDRM (<i>data</i>) | 69 |
| 11.7.10 | SEARCHADDRL (<i>data</i>) | 69 |
| 11.7.11 | PROGRAM SHORT ADDRESS (<i>data</i>) | 69 |
| 11.7.12 | VERIFY SHORT ADDRESS (<i>data</i>) | 69 |
| 11.7.13 | QUERY SHORT ADDRESS | 69 |
| 11.7.14 | ENABLE DEVICE TYPE (<i>data</i>) | 70 |
| 11.7.15 | DTR1 (<i>data</i>) | 70 |
| 11.7.16 | DTR2 (<i>data</i>) | 70 |
| 11.7.17 | WRITE MEMORY LOCATION (<i>DTR1, DTR0, data</i>) | 70 |
| 11.7.18 | WRITE MEMORY LOCATION – NO REPLY (<i>DTR1, DTR0, data</i>) | 71 |
| 11.7.19 | PING | 71 |
| 12 | Test procedures | 71 |
| | Void | |
| Annex A (informative) | Examples of algorithms | 72 |
| A.1 | Random address allocation | 72 |
| A.2 | One single control gear connected to the control device | 72 |
| A.3 | Using application extended commands | 73 |
| Annex B (normative) | High resolution dimmer | 74 |

| | |
|--|----|
| Bibliography | 76 |
| Figure 1 – IEC 62386 graphical overview | 9 |
| Figure 2 – Control gear directly operating a light source | 16 |
| Figure 3 – Dimming curve | 18 |
| Figure 4 – Level over time, fading up and down | 21 |
| Figure 5 – Timing and response when executing command iteration | 29 |
| Figure 11 – Correlation between “ <i>lampFailure</i> ”, “ <i>lampOn</i> ”, and “ <i>fadeRunning</i> ” bits | 43 |
| Figure B.1 – Level behaviour in cases of off-grid starting points | 75 |
| Table 1 – 16-bit command frame encoding | 15 |
| Table 2 – Dimming curve tolerance (% , rounded to two decimals) | 18 |
| Table 3 – Dimming curve | 19 |
| Table 4 – Fade times | 22 |
| Table 5 – Fade rates | 23 |
| Table 6 – Extended fade time – base value | 24 |
| Table 7 – Extended fade time – multiplier | 24 |
| Table 8 – Basic memory map of memory banks | 31 |
| Table 9 – Memory map of memory bank 0 | 33 |
| Table 10 – Memory map of memory bank 1 | 36 |
| Table 11 – Power on timing | 39 |
| Table 12 – Control gear status | 41 |
| Table 13 – Scenes | 46 |
| Table 14 – Declaration of variables | 47 |
| Table 15 – Standard commands | 49 |
| Table 16 – Special commands | 53 |
| Table 17 – Light source type encoding | 64 |
| Table 18 – Device addressing with “INITIALISE” | 67 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 102: General requirements – Control gear

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

DISCLAIMER

This Consolidated version is not an official IEC Standard and has been prepared for user convenience. Only the current versions of the standard and its amendment(s) are to be considered the official documents.

This Consolidated version of IEC 62386-102 bears the edition number 2.1. It consists of the second edition (2014-11) [documents 34C/1099/FDIS and 34C/1112/RVD], its amendment 1 (2018-09) [documents 34/523/FDIS and 34/534/RVD]. The technical content is identical to the base edition and its amendment.

This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.

International Standard IEC 62386-102 has been prepared by subcommittee 34C: Auxiliaries for lamps, of IEC technical committee 34: Lamps and related equipment.

This second edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) elimination of all non-control gear relevant definitions,
- b) improvement of the requirements for control gear by clarifying the description,
- c) improvement of the test command iterations to increase the compatibility,
- d) addition of new commands, and
- e) the deletion of the requirements for:
 - 1) timing;
 - 2) control devices.

The requirements for timing are now in Part 101 and the requirements for control devices are in Part 103.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

This Part 102 is intended to be used in conjunction with Part 101, which contains general requirements for the relevant product type (system), and with the appropriate Part 2xx (particular requirements for control gear) containing clauses to supplement or modify the corresponding clauses in Parts 101 and 102 in order to provide the relevant requirements for each type of product.

A list of all parts of the IEC 62386 series, under the general title: *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 62386 contains several parts, referred to as series. The 1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices.

The 2xx parts extend the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The 3xx parts extend the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This second edition of IEC 62386-102 is intended to be used in conjunction with IEC 62386-101:2014 and IEC 62386-101:2014/AMD1:2018 and with the various parts that make up the IEC 62386-2xx series for control gear, together with IEC 62386-103:2014 and IEC 62386-103:2014/AMD1:2018 and the various parts that make up the IEC 62386-3xx series of particular requirements for control devices. The division into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognised.

The setup of the standard is graphically represented in Figure 1 below.

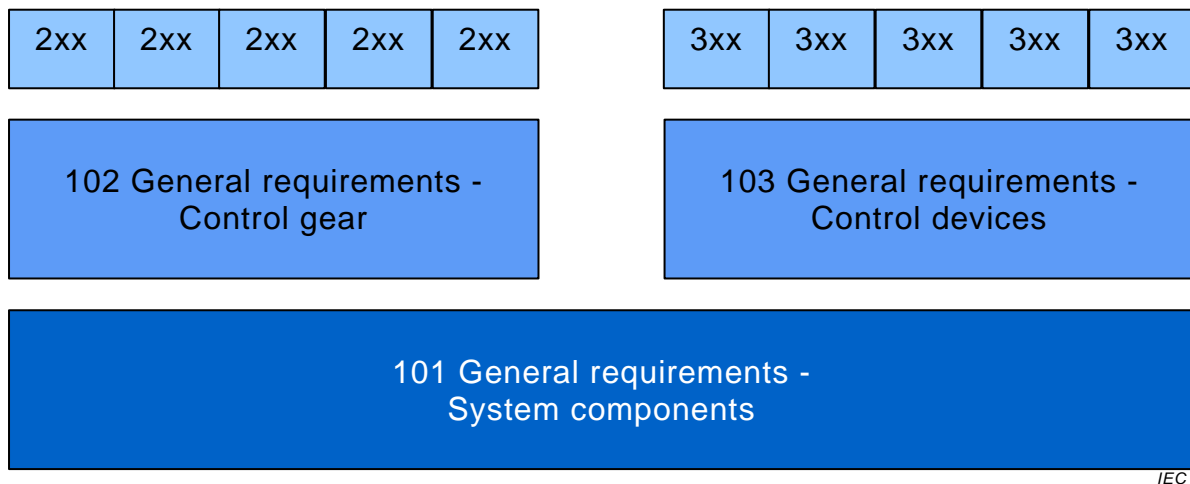


Figure 1 – IEC 62386 graphical overview

When this part of IEC 62386 refers to any of the clauses of the other two parts of the IEC 62386-1xx series, the extent to which such a clause is applicable and the order in which the tests are to be performed are specified. The other parts also include additional requirements, as necessary.

All numbers used in this International Standard are decimal numbers unless otherwise noted. Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in the format XXXXXXXXb or in the format XXXX XXXX, where X is 0 or 1 and "x" in binary numbers means "don't care".

The following typographic expressions are used:

Variables: *variableName* or *variableName[3:0]*, giving only bits 3 to 0 of *variableName*

Range of values: [lowest, highest]

Command: "COMMAND NAME"

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 102: General requirements – Control gear

1 Scope

This Part of IEC 62386 is applicable to control gear in a bus system for control by digital signals of electronic lighting equipment which is in line with the requirements of IEC 61347 (all parts), with the addition of DC supplies.

NOTE Tests in this standard are type tests. Requirements for testing individual control gear during production are not included.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:2014, *Digital addressable lighting interface – Part 101: General requirements – System components*
IEC 62386-101:2014/AMD1:2018

IEC 62386-103:2014, *Digital addressable lighting interface – Part 103: General requirements – Control devices*
IEC 62386-103:2014/AMD1:2018

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62386-101 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

actual level

value representing the current light output

3.2

arc power

power supplied to the light sources (lamps)

3.3

broadcast

type of address used to address all control gear in the system at once