

INCH-POUND

MIL-PRF-83536/5E
20 June 2019
SUPERSEDING
MIL-PRF-83536/5D
25 March 2016

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT,
LOW LEVEL TO 5 AMPERES, PERMANENT MAGNET DRIVE,
HERMETICALLY SEALED, ALL WELDED, DC COILS

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist
of this specification sheet and the latest issue of [MIL-PRF-83536](#).

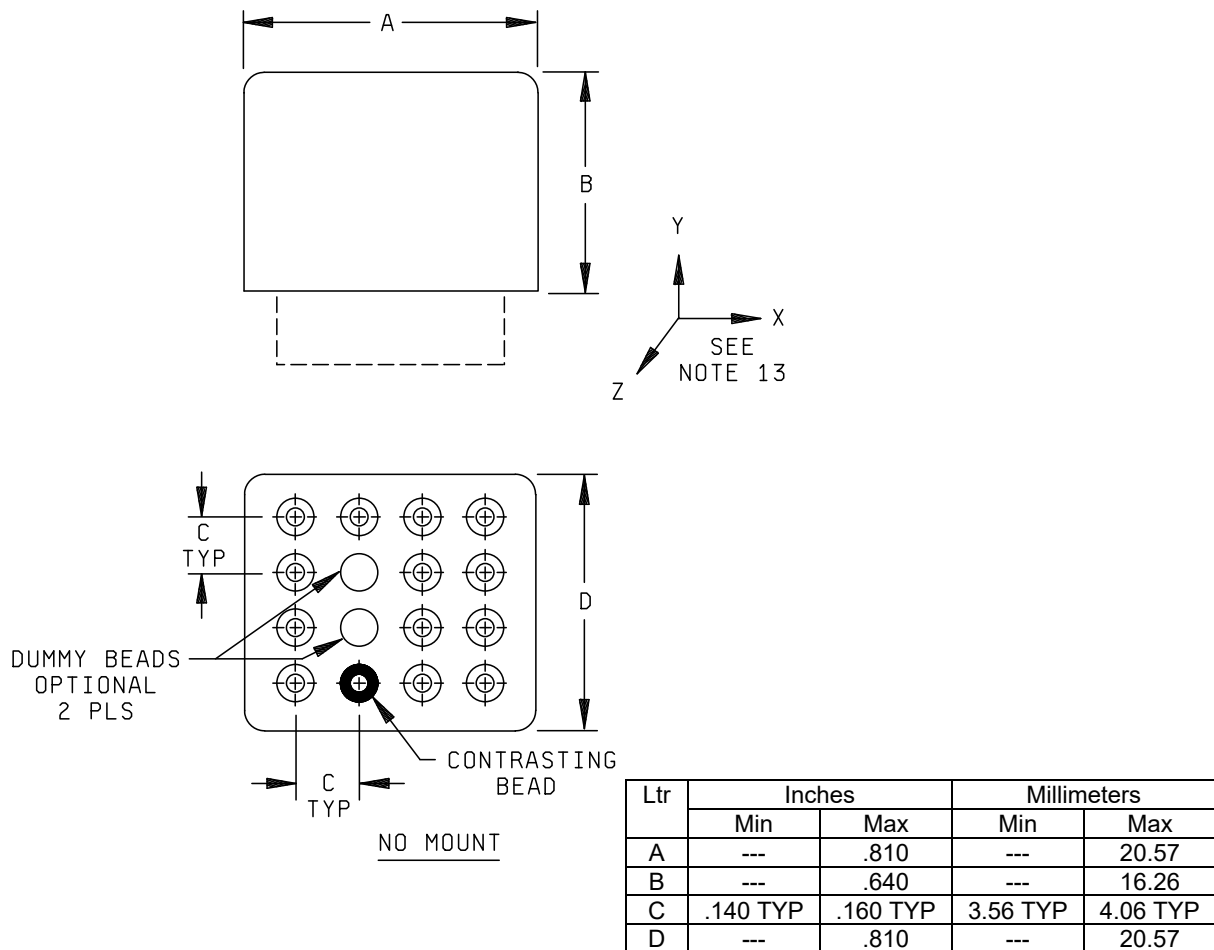


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5945

