

INCH-POUND

MIL-PRF-83536/9F  
20 June 2019  
SUPERSEDING  
MIL-PRF-83536/9E  
29 March 2016

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT,  
LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE,  
HERMETICALLY SEALED, ALL WELDED, DC COILS

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein  
shall consist of this specification sheet and [MIL-PRF-83536](#).

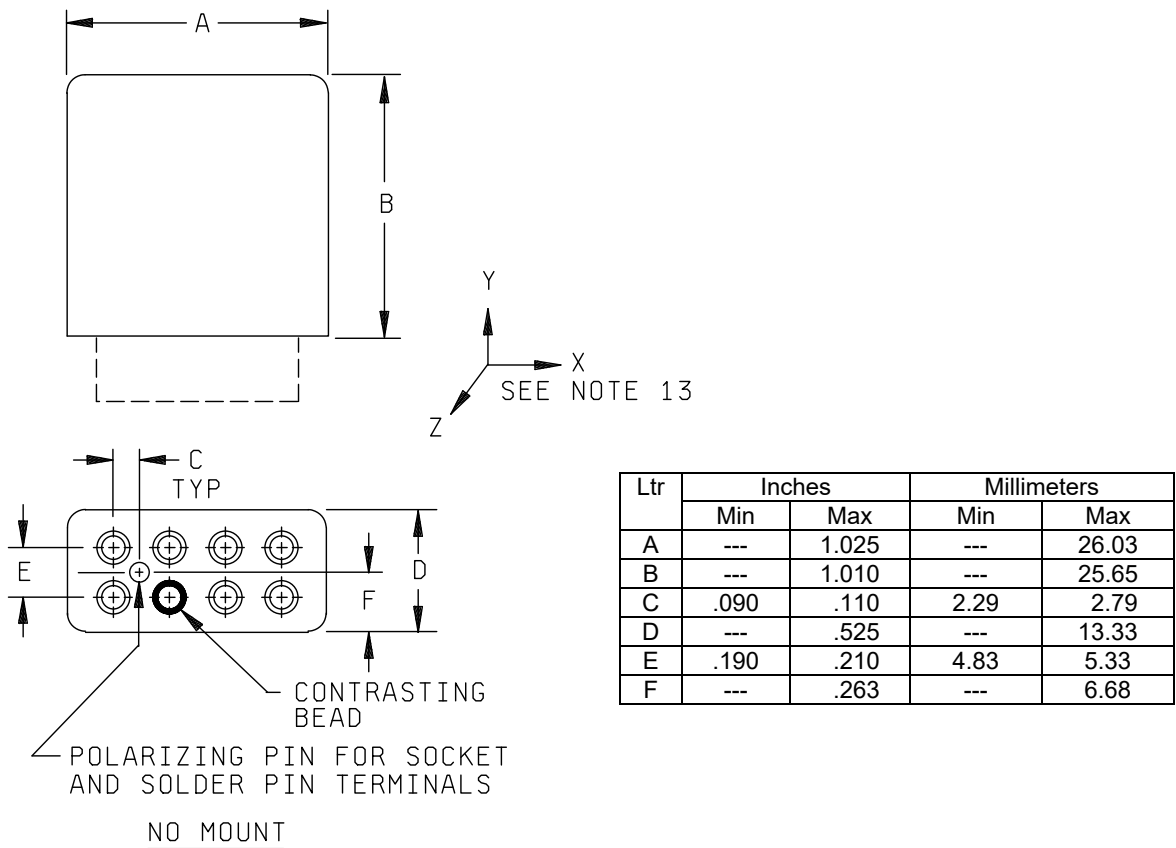


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5945

