



**OPERATING
SECTION
REPORT**




**GAS
MEASUREMENT
MANUAL**

**MEASUREMENT OF
GAS PROPERTIES**

PART NO. ELEVEN

CATALOG NO. XQ8804

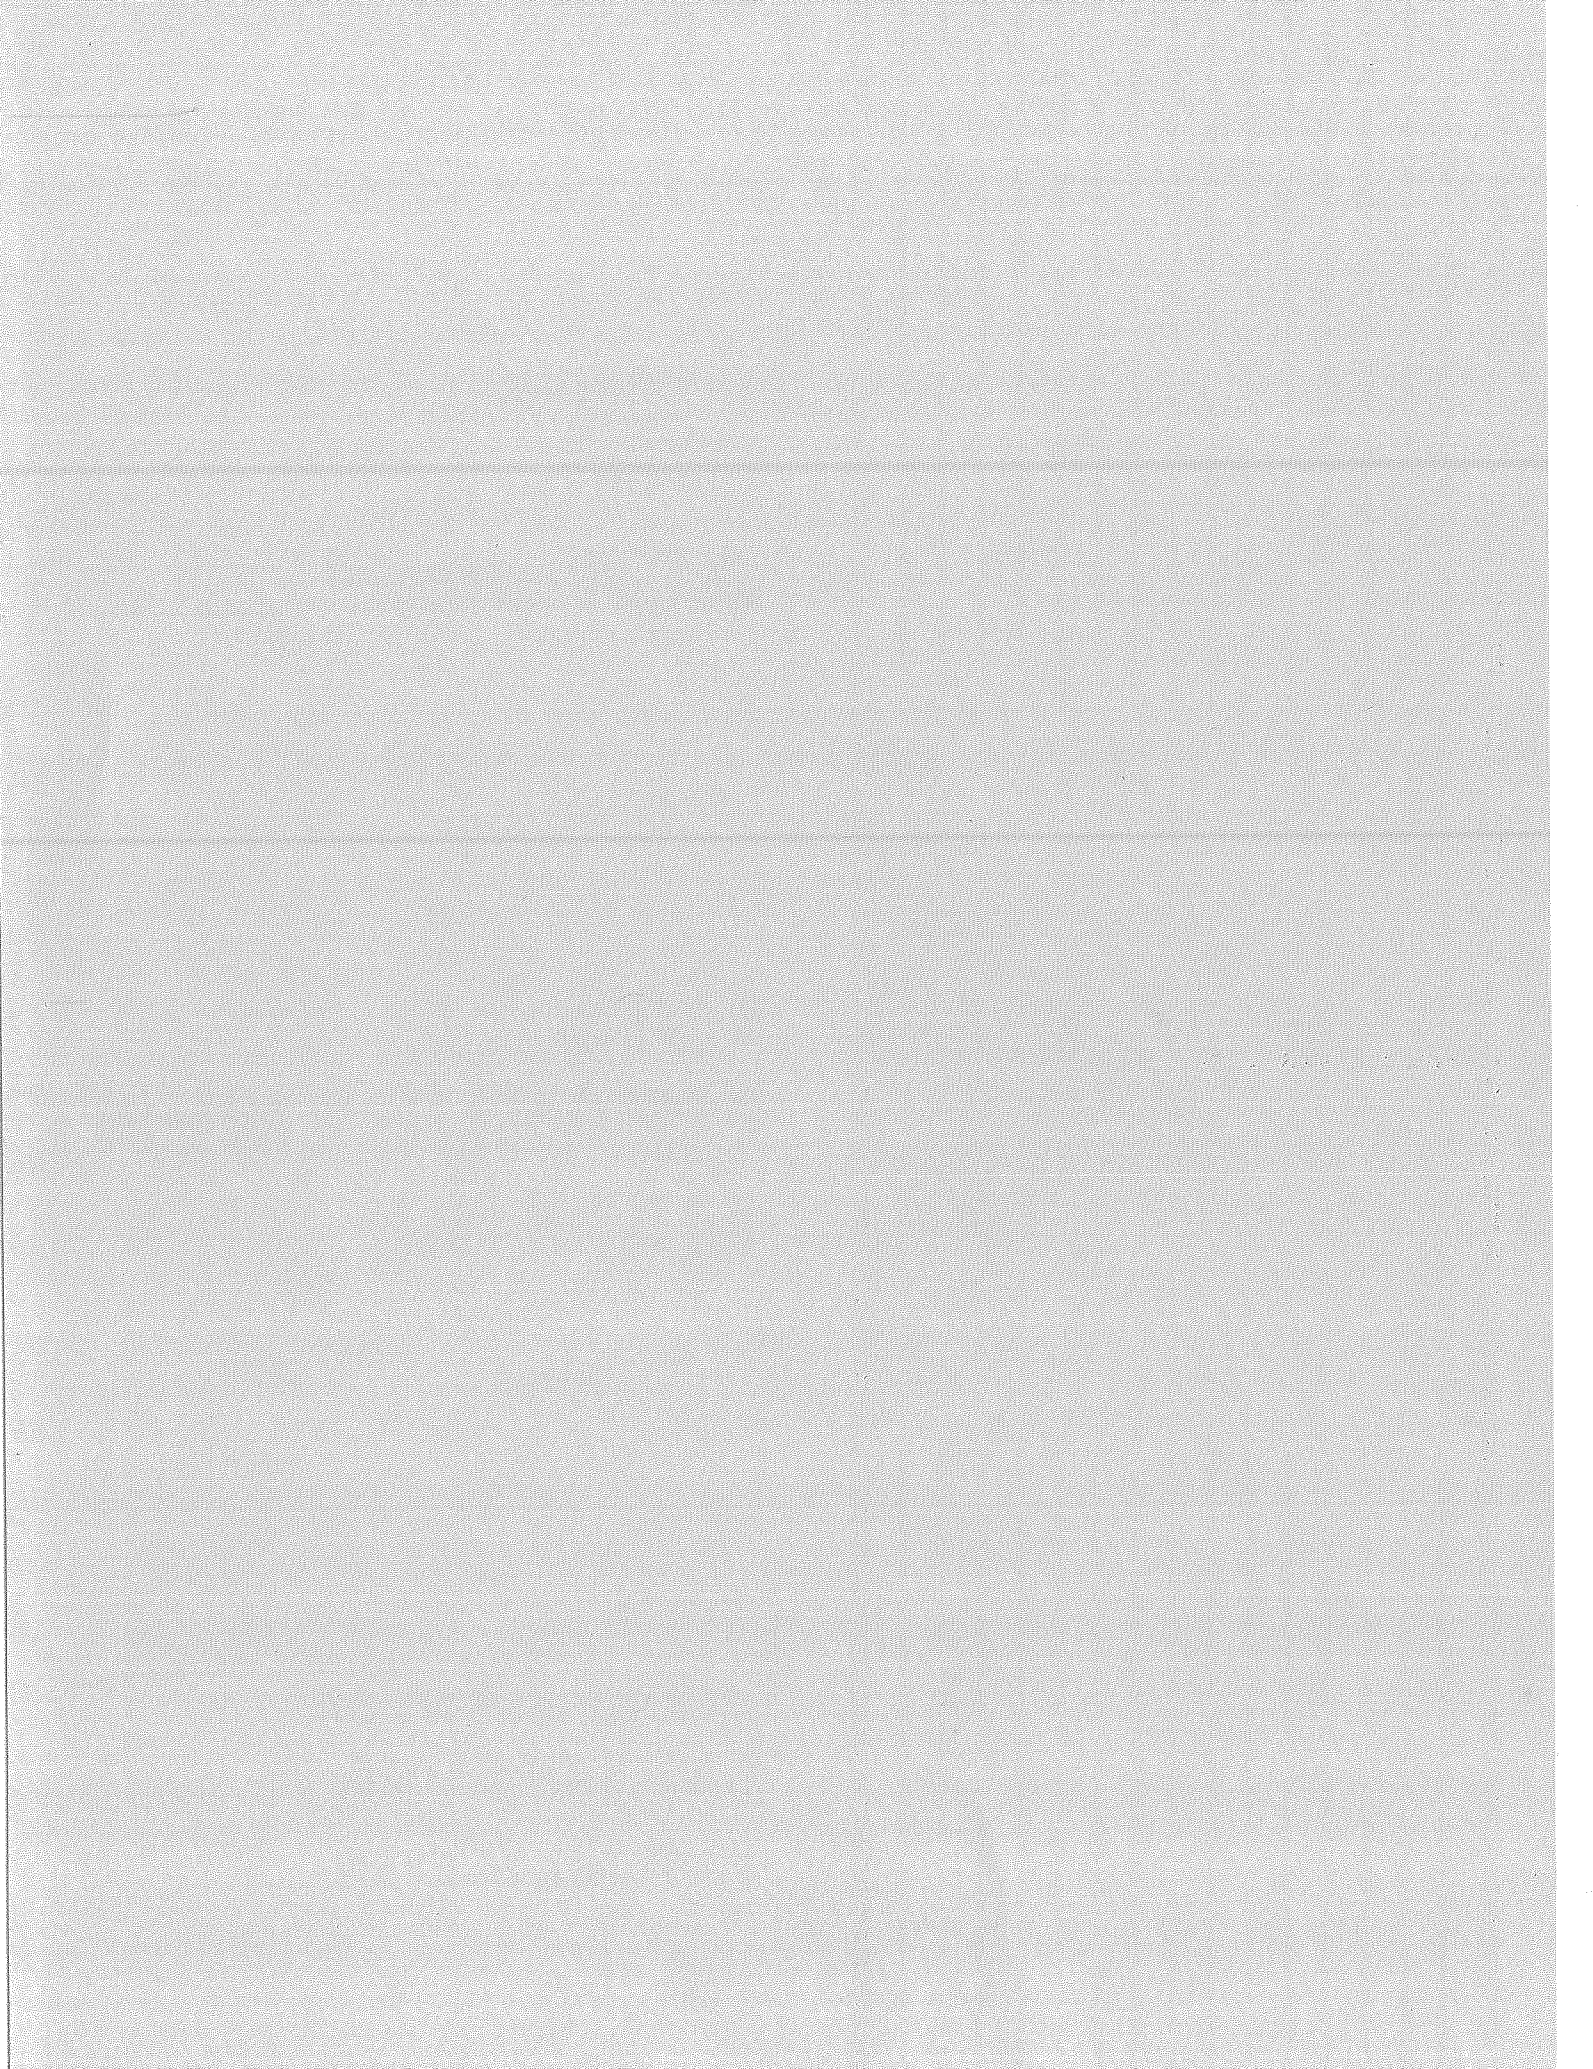

A.G.A. GAS MEASUREMENT MANUAL (REVISED)

PART ELEVEN MEASUREMENT OF GAS PROPERTIES

- SECTION 11.1—SPECIFIC GRAVITY DETERMINATION
- SECTION 11.2—HEATING VALUE OF GAS DETERMINATION
- SECTION 11.3—GAS SAMPLING
- SECTION 11.4—SULFUR DETERMINATION
- SECTION 11.5—TEMPERATURE AND PRESSURE DETERMINATION
- SECTION 11.6—SUPERCOMPRESSIBILITY DETERMINATION
- SECTION 11.7—DENSITY DETERMINATION
- SECTION 11.8—GAS ANALYSIS
- SECTION 11.9—GAS ODORIZATION
- SECTION 11.10—WATER VAPOR DETERMINATION

**Prepared by the Distribution Measurement
and Transmission Measurement Committee
of the Operating Section**

American Gas Association
1515 Wilson Boulevard
Arlington, Virginia 22209

© 1988 AMERICAN GAS ASSOCIATION
All rights reserved

Other Manual Parts Published:

- Part 1 General (XQ1081)
- Part 2 Displacement Measurement (XZ0277)
- Part 4 Gas Turbine Metering (XQ0684)
- Part 5 Other Measurement Methods (XQ0483)
- Part 6 Auxiliary Devices (XQ0779)
- Part 7 Measurement Calculations and Data Gathering (XQ0379)
- Part 9 Design of Meter and Regulation Stations (XQ8803)
- Part 10 Pressure and Volume Control (XQ0584)
- Part 12 Meter Proving (XQ0278)
- Part 13 Distribution Metering Data (XQ0278)
- Part 14 Meter Repair & Selection (XQ0381)

Printed in the U.S.A.

CONTENTS

SECTION 11.1—SPECIFIC GRAVITY DETERMINATION

	Page
Introduction	11.1.1
Definition	11.1.1
Specific Gravity Relationship to Gas Measurements	11.1.1
Effect of Specific Gravity Errors	11.1.1
Gas Sampling	11.1.2
Determining Specific Gravity by Laboratory Methods	11.1.2
Direct Weighing	11.1.2
Gas Analysis	11.1.2
Field Methods for Determining Specific Gravity	11.1.3
Effusion Method	11.1.3
Weighing Method (Gravity Balance)	11.1.3
Centrifugal Method	11.1.7
Kinetic Energy Method	11.1.7
Recording Gravimeters	11.1.9
Recording Weighers	11.1.10
Centrifugal Method	11.1.12
Location and Calibration	11.1.12
Determination of the Specific Gravity of Gas that Contains Distillates	11.1.12
References	11.1.13

SECTION 11.2—HEATING VALUE OF GAS DETERMINATION

	Page
Terms and Definitions	11.2.1
Calculating the Heating Value from Gas Analysis	11.2.2
Total Heating Value Instruments	11.2.3
Recording Calorimeter	11.2.3
Thermeter	11.2.6
Stoichiometric Combustion Calorimeter	11.2.7
Special Precautions	11.2.10
Chromatographs	11.2.10
Sample System	11.2.11
Process Chromatograph	11.2.12
Controller	11.2.13
Correction of Gas Heating Value for Water Vapor Content	11.2.13
Introduction	11.2.13
Water Vapor in Saturated Gas	11.2.14
Adjusting BTU for Water Vapor	11.2.16
Pressure Base	11.2.16
Temperature Base	11.2.16
Water Vapor Base	11.2.16
Saturated to Dry Conversion	11.2.16
Dry to Saturated Conversion	11.2.17
Dry to Actual Water Vapor Conversion	11.2.17
Saturated to Actual Water Vapor Content Conversion	11.2.17

SECTION 11.3—GAS SAMPLING

	Page
Introduction	11.3.1
Sampling Probes	11.3.1
Continuous On-Line Sampling	11.3.2
Spot Sampling	11.3.4
Accumulative Sampling Over a Period of Time	11.3.4
Cleaning and Filling the Sample Cylinder	11.3.5
Purging Schedule for the Sample Cylinder	11.3.5
Discharging of Sample Containers: The Complete Fluid Vaporization Method	11.3.6
Sampling Materials	11.3.8
Determination of Water Vapor and Hydrogen Sulfide	11.3.8
Shipping of Samples	11.3.8

SECTION 11.4—SULFUR DETERMINATION

	Page
Introduction	11.4.1
Lead Acetate Paper	11.4.2
Colorimetric Gas Detectors	11.4.2
The Cadmium Sulfate Test	11.4.3
Methylene Blue Method	11.4.3
Total Sulfur Determination by Hydrogenation	11.4.4
Electrolytic Titrators	11.4.5
H ₂ S Analyzers	11.4.8
Chromatographs	11.4.8
References	11.4.12

SECTION 11.5—TEMPERATURE AND PRESSURE DETERMINATION

TEMPERATURE DETERMINATION

	Page
Definitions	11.5.1
Temperature	11.5.1
Absolute Temperature	11.5.2
Temperature Recorders	11.5.2
Filled-System Temperature Recorders	11.5.2
Liquid-Filled Thermal System (Class I)	11.5.3
Vapor Pressure Thermal System (Class II)	11.5.4
Gas-Filled Thermal System (Class III)	11.5.5
Mercury-Filled Thermal System (Class IV)	11.5.5
General	11.5.5
Installation	11.5.7
Operation and Testing	11.5.7
The Chart	11.5.7
Test and Inspection of the Recorder	11.5.7
Field Test Procedure	11.5.8
Spot Checks	11.5.8
Constant Temperature Condition	11.5.8
Varying Temperature Conditions	11.5.8

PRESSURE DETERMINATION

Definitions	11.5.9
Atmospheric Pressure	11.5.9
Absolute Pressure	11.5.9
Gauge Pressure	11.5.10
Pressure Measuring Devices	11.5.10
Mechanical Pressure Gauges	11.5.10
Bourdon Tube	11.5.10
Diaphragm and Bellows	11.5.10
Tests and Inspection of Pressure Gauges	11.5.10
Deadweight Instruments	11.5.10
Deadweight Gauge	11.5.10
Deadweight Tester	11.5.12
Some Basic Rules for Use of Deadweight Instruments	11.5.12
Manometers	11.5.13
General	11.5.13

SECTION 11.6—SUPERCOMPRESSIBILITY DETERMINATION

	Page
The Ideal Gas Law	11.6.1
Deviation from the Ideal Gas Law	11.6.1
Supercompressibility Determination by Test	11.6.3
Supercompressibility Manuals	11.6.4
References	11.6.6

SECTION 11.7—DENSITY DETERMINATION

	Page
Introduction	11.7.1
Definitions	11.7.1
Density	11.7.1
Specific Weight	11.7.1
Mass(m)-Weight(w)	11.7.1
Engineering Commentary	11.7.1
Gas Density Measurement Methods	11.7.2
Direct Methods	11.7.2
Indirect Methods	11.7.2
Criteria for Selecting Densitometers	11.7.2
Installation and Practice	11.7.2
Examples	11.7.5
Turbine Flowmeter Run (Typical)	11.7.6
Orifice Meter Run (Typical)	11.7.6
Primary Uses of Densitometers	11.7.6
Field Calibration of Densitometers	11.7.7
The Pycnometer	11.7.7
Secondary Transfer Standard for Calibrating On-Line Densitometers	11.7.9
Gas Laws Applied to Calibration	11.7.10
Mathematics of Gas Mass Density Measurement and Flow Metering	11.7.10
Specific Gravity (G)	11.7.12

Orifice Flow Equation	11.7.12
Base Volume Flow from Weight Flow and G	11.7.13
Flow Equations for Turbine, Rotary, and Positive Displacement Meters	11.7.13
Flow System Coefficient Optimization-Utilizing the Mass Density Function	11.7.14
Other Applications Related to Orifice Plate Flow Coefficient Correction	11.7.14
Turbine Flowmeter K Factor Corrections	11.7.15
Therms (Energy Metering)	11.7.16
Therms Flow/Mass Flow	11.7.16
Conclusions	11.7.16
References	11.7.16

SECTION 11.8 – GAS ANALYSIS

	Page
Introduction	11.8.1
Chromatography	11.8.1
Water Vapor and Sulfur Determination	11.8.1
Volumetric Analysis	11.8.1
Theory	11.8.1
Apparatus	11.8.2
Accuracy	11.8.3
Analysis of CO ₂ by Infrared Absorption	11.8.3
Micro-Fuel Cell Analysis of Trace Oxygen	11.8.3

SECTION 11.9 – GAS ODORIZATION

	Page
Introduction	11.9.1
Required Odor Intensity	11.9.1
Explosive Limits	11.9.1
Selection of an Odorant	11.9.1
Required Properties	11.9.1
Desirable Properties of an Odorant	11.9.2
Commonly Used Odorant Compounds	11.9.2
Mercaptan Odorants	11.9.2
Odorizing Equipment	11.9.4
Types of Odorizers	11.9.4
Liquid Injection Odorizers	11.9.4
Evaporation Odorizers	11.9.7
Odorizer Installation	11.9.9
Site Selection	11.9.9
Materials of Construction	11.9.9
Vapor Control	11.9.9
Handling Odorant in Drums	11.9.10
Returnable Cylinders	11.9.10
Handling of Spills	11.9.10
Odor Level Determination	11.9.11
Dilution Apparatus	11.9.11
Room Test	11.9.11
Sniff Test	11.9.13

Instrumentation Methods of Odorant Analysis	11.9.14
Electrolytic Titration	11.9.14
Gas Chromatography	11.9.15
Colorimetric Methods	11.9.15
Detector Tubes	11.9.15
Wet Chemical Technique	11.9.16

SECTION 11.10—WATER VAPOR DETERMINATION

	Page
Introduction	11.10.1
General	11.10.1
Sampling	11.10.1
Concentration	11.10.1
Location of Sampling Device	11.10.6
Selection of Materials for Sampling Systems	11.10.6
Volume of the System	11.10.6
Constant Pressure	11.10.6
Sample Site Selection	11.10.6
Methods of Determining Water Vapor Content	11.10.6
Dew Point or Condensate Method	11.10.6
Electrolytic Water Analyzer	11.10.8
Direct Chemical Method	11.10.9
Hygroscopic Conductivity	11.10.10
Quartz Crystal Oscillator	11.10.11
Aluminum Oxide Hygrometer	11.10.11
Calibration of Water Vapor Measuring Instruments	11.10.11
Dew Point Method	11.10.11
Chemical Methods	11.10.12
Permeation Tubes	11.10.12
Other Methods	11.10.12
Bibliography	11.10.12

FIGURES

Figure		Page
11.1.1	Portable specific gravity balance	11.1.5
11.1.2	Gas gravity balance pressure ratio adjustment values to compensate for Doyle's law deviation	11.1.5
11.1.3	Factors for converting inches of mercury at manometer temperature to inches of mercury at 32°F	11.1.6
11.1.4	Schematic of gas centrifuge gravitometer	11.1.7
11.1.5	Cross-section of the centrifuge wheel	11.1.8
11.1.6	Operating principle—portable indicator	11.1.9
11.1.7	Schematic diagram of a recording gravitometer having gas-filled drums suspended from a balance beam	11.1.10
11.1.8	A recording gravitometer in which the unit weight of a column of gas is compared to a unit weight of an equal column of air	11.1.11
11.1.9	Schematic diagram of a recording gas gravitometer with single float on a weight-opposed beam	11.1.12
11.2.1	Flow diagram and part identification of a recording calorimeter	11.2.5
11.2.2	Schematic flow diagram of a thermometer	11.2.7
11.2.3	Functional diagram of a stoichiometric combustion calorimeter	11.2.9
11.2.4	Functional overview of a gas BTU transmitter	11.2.9
11.2.5	Gas analysis system using chromatograph	11.2.11
11.2.6	Process chromatograph	11.2.12
11.2.7	Water content of actual gas versus temperature	11.2.15
11.3.1	Sampling stinger	11.3.2
11.3.2	Piping connection for calorimeter	11.3.4
11.3.3	Purging schedule and equations for the sample cylinder	11.3.6
11.3.4	Typical constant pressure sampler	11.3.7
11.4.1	Physical effects of inhaling H ₂ S	11.4.1
11.4.2	Two types of gas detectors	11.4.3
11.4.3	Schematic of cadmium sulfate test	11.4.4
11.4.4	Absorption flask	11.4.4
11.4.5	Schematic diagram of apparatus for sulfur method	11.4.5
11.4.6	Schematic of an electrolytic titrator	11.4.6
11.4.7	Schematic of an electrolytic titration cell	11.4.6
11.4.8	Typical chart of an electrolytic titrator	11.4.8
11.4.9	Schematic of an H ₂ S analyzer	11.4.9
11.4.10	Typical chart of a continuous recording H ₂ S analyzer	11.4.10
11.4.11	Typical chart of a fixed-cycle recording H ₂ S analyzer	11.4.10
11.4.12	Schematic of a gas chromatograph	11.4.11
11.5.1	Temperature scales	11.5.1
11.5.2	The filled thermal system of a typical temperature recorder	11.5.3
11.5.3	A temperature recorder system fully compensated for the effects of ambient temperature	11.5.4
11.5.4	A case compensated thermal system	11.5.4
11.5.5	A Class II-A thermal system	11.5.6
11.5.6	A Class II-B thermal system	11.5.6
11.5.7	A Class II-C thermal system	11.5.6
11.5.8	A Class II-D thermal system	11.5.6
11.5.9	Diagram of relations between absolute and gauge pressures	11.5.9
11.5.10	Bourdon tube and helical	11.5.11
11.5.11	Diaphragm and bellows elements	11.5.11
11.5.12	Deadweight gauge	11.5.11
11.5.13	Deadweight tester	11.5.13

11.6.1	Variation of compressibility factor with pressure for three general types of gas	11.6.3
11.6.2	Pure hydrocarbon gas 0.600 specific gravity	11.6.7
11.7.1	Insertion type densitometer—direct into flowing pipeline	11.7.3
11.7.2	Sampling type densitometer—the sample lines straddle a nonflow measuring orifice inducing flow through the densitometer	11.7.3
11.7.3	Sampling type densitometer—sampling lines are connected to positive and negative pressure sample tubes to induce flow through the densitometer	11.7.4
11.7.4	Sampling type densitometer—employs sampling blower to induce flow through densitometer at rates independent of flow rate in main line stream	11.7.4
11.7.5	Point of density measurement to flowmeter element—for orifices, point 2 is the static pressure tap; for turbine meters point 2 is upstream of the rotor	11.7.5
11.7.6	Typical turbine meter run showing alternate positions relative to turbine meter run for insert-type densitometer	11.7.6
11.7.7	Typical turbine meter showing sampling type densitometer relative to turbine meter run	11.7.7
11.7.8	Typical orifice meter run showing four alternate positions for densitometers	11.7.7
11.7.9	Field calibration, with pycnometer or master densitometer, for typical line sampling densitometer	11.7.8
11.7.10	Field calibration system, with pycnometer or master densitometer, for typical in-line densitometer	11.7.9
11.7.11	Field calibration system for typical in-line densitometer using an in-line master densitometer	11.7.10
11.7.12	Field calibration of typical in-line densitometer by computation from gas law equation	11.7.11
11.8.1	Orsat volumetric analysis apparatus	11.8.2
11.9.1	Drip odorizer for liquid injection	11.9.5
11.9.2	Typical diaphragm displacement pump with pneumatic controller	11.9.6
11.9.3	Single-unit wick odorizer	11.9.8
11.9.4	By-pass odorizer	11.9.8
11.9.5	Three views of a vehicle used for conducting the gas odorant room test	11.9.12
11.10.1	Water vapor content of compressed natural gas	11.10.3
11.10.2	Bureau of Mines dewpoint tester	11.10.5
11.10.3	Thermoelectric dewpoint apparatus	11.10.7
11.10.4	Schematic of electrolytic water analyzer	11.10.8
11.10.5	Automatic direct chemical titration method	11.10.10

TABLES

Table	Page
11.1.1 Sample Specific Gravity Determination	11.1.3
11.2.1 Physical Properties of Gases at Exactly 14.73 Pounds per Square Inch Absolute and 60°F	11.2.3
11.2.2 Sample Calculation of Heating Value from Gas Analysis	11.2.4
11.2.3 Summation Factors at 60°F (288.71K)	11.2.4
11.3.1 Natural Gas (Typical Casing-Head) with High Boil-Point Hydrocarbons	11.3.8
11.4.1 Component Analysis	11.4.8
11.4.2 Range of Measurement by Type of Detector	11.4.11
11.10.1 Typical Vapor Pressure of Water	11.10.2



Section 11.1

SPECIFIC GRAVITY DETERMINATION

INTRODUCTION

Definition

Specific gravity is a term used to express the ratio of the molecular weight of a gas (or a mixture of gases) to the molecular weight of air. Air is a compound of varying composition. Its molecular weight has been established as 28.9625, as reported in the Table of Physical Properties, A.G.A. Report #3, revised 5/16/85. Where precise specific gravity determinations are made by analytical means, the prevailing composition of air is of no consequence if consistently related to the number 28.9625. Yet, considering technical inability to determine the molecular weight of gas short of analytical fractionation, the ratio of gas density to the density of air under common pressure and temperature conditions is often taken to represent specific gravity. The difference between relative density and relative molecular weight is small, provided, however, that densities are determined at relatively low pressures. Any difference between the two ratios may be attributed to the difference in Ideal Gas Laws deviation at any given common pressure and temperature, if we can assume the composition of reference air at a particular locale approximates a molecular weight of 28.9625. Relative densities may be converted to relative molecular weight (specific gravity) by accounting for the Ideal Gas Laws.

Specific Gravity Relationship to Gas Measurements

Specific gravity is a fundamental aspect of a gas in several gas measuring sectors. In flow metering, the pressure drop across an orifice, flow nozzle, venturi tube, or similar restriction is affected by the molecular weight of the flowing fluid. Also, the relationships that have been found between specific gravity of a gas and its deviation from Ideal Gas Laws account for the preparation of A.G.A.'s *Manual for the Determination of Supercompressibility Factors for Natural Gas* PAR Research Project NX-19*. Similar relationships have also been found between specific gravity and the calorific value of fuel gases and are covered by A.G.A.'s publication Report No. 5, *Fuel Gas Energy Metering*.

Effect of Specific Gravity Errors

Any error in specific gravity determination is very significant, if examined in the light of any one of the several factors affected — F_{gr} , F_{pv} , F_{hgm} , and the heating value of a gas. Yet the overall effect of specific gravity error will be found less than the sum of individual errors, considering the error attributed to a single factor is often offset by compensating errors in other factors tied to a specific gravity index. The effect of specific gravity error on individual factors and combined factors used in orifice meter measurements is illustrated in the following example for a hydrocarbon gas mixture flowing at 1000 psia, at 60°F, under standard gravitational forces of 980.665 cm/sec./sec. (32.174 ft/sec²) at sea level and 45° latitude.

	EXAMPLE					
	Specific Gravity	Factor F_{gr} (Report #3)	Factor F_{pv} (NX-19)	Factor F_{hgm} (Report #3)	Btu/cf (Report #5)	Combined Factors
Correct	.600	1.2910	1.0834	.9978	1086.9	1516.9
Erroneous	.610	1.2804	1.0872	.9977	1102.6	1531.3
% Error	+1.67	-0.82	+0.35	-0.01	+1.44	+0.95

*This manual has been superseded by A.G.A. Transmission Measurement Committee Report #8. A.G.A. 8 extends the range of contaminants, pressures, and temperatures allowed when it is used to calculate F_{pv} .